

BRIGHT-TOOLS

BRIGHT-TOOLS

**TOOL HOLDERS**

# **ANTI VIBRATION**

BRIGHT-TOOLS

BRIGHT-TOOLS

BRIGHT-TOOLS

BRIGHT-TOOLS

BRIGHT-TOOLS

BRIGHT-TOOLS


## Damping Face Mill Holder

### 抗震铣刀柄



Size	d	D	L	L1	L2
BT50-FMB22-048-370	22	48	371	333	19
BT50-FMB22-060-460	22	60	460	422	19
BT50-FMB27-076-570	27	76	572	534	21
BBT50-FMB22-048-370	22	48	371	333	19
BBT50-FMB22-060-460	22	60	460	422	19
BBT50-FMB27-076-570	27	76	572	534	21
HSK63A-FMB16-038-160	16	38	160	131	11
HSK63A-FMB16-038-230	16	38	230	201	11
HSK63A-FMB22-048-210	22	48	210	181	16
HSK63A-FMB22-048-260	22	48	260	231	16
HSK100A-FMB22-048-213	22	48	213	181	16
HSK100A-FMB22-048-263	22	48	263	231	16
HSK100A-FMB22-060-230	22	60	230	198	16
HSK100A-FMB22-060-340	22	60	340	308	16
HSK100A-FMB27-076-250	27	76	250	218	18
HSK100A-FMB27-076-390	27	76	390	358	18
HSK100A-FMB32-080-250	32	80	250	218	20
HSK100A-FMB32-080-390	32	80	390	358	20

## Damping Turning Tool Holder 抗震车刀杆

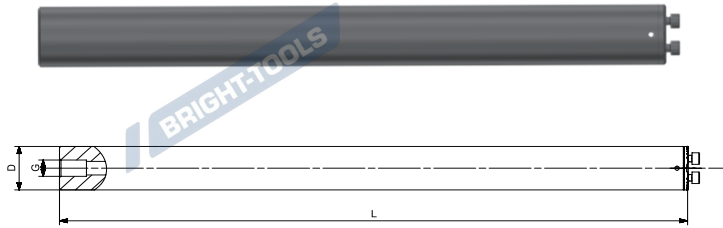

Size	D1	D	L	L/D
C16-AV-7D-K	16	16	176	7
C16-AV-10D-K	16	16	224	10
C20-AV-7D-K	20	20	220	7
C20-AV-10D-K	20	20	280	10
C25-AV-7D-K	25	25	275	7
C25-AV-10D-K	25	25	350	10
C25-AV-12D-K	25	25	400	12
C32-AV-7D-K	32	32	352	7
C32-AV-10D-K	32	32	448	10
C32-AV-12D-K	32	32	512	12
C40-AV-7D-K	40	40	440	7
C40-AV-10D-K	40	40	560	10
C40-AV-12D-K	40	40	640	12


## Damping Finishing Boring Tool Holder

### 阻尼减振精镗刀



Size	Insert seat	D	D1	D2	H	L	L1	Insert
BT50-DF2136-130	F1-1	21-26	20	30	130	160	198	TP0802
	F1-2	25-31	20	30	130	160	198	TP0802
	F1-3	30-36	20	30	130	160	198	TP0802
BT50-DF2136-170	F1-1	21-26	20	30	170	200	238	TP0802
	F1-2	25-31	20	30	170	200	238	TP0802
	F1-3	30-36	20	30	170	200	238	TP0802
BT50-DF2647-165	F2-1	26-33	25	35	165	200	238	TP0802
	F2-2	32-40	25	35	165	200	238	TP0802
	F2-3	39-47	25	35	165	200	238	TP0802
BT50-DF2647-215	F2-1	26-33	25	35	215	250	288	TP0802
	F2-2	32-40	25	35	215	250	288	TP0802
	F2-3	39-47	25	35	215	250	288	TP0802
BT50-DF3360-210	F3-1	33-42	32	45	210	256	294	TP0802
	F3-2	41-51	32	45	210	256	294	TP0802
	F3-3	50-60	32	45	210	256	294	TP0802
BT50-DF3360-275	F3-1	33-42	32	45	275	320	358	TP0802
	F3-2	41-51	32	45	275	320	358	TP0802
	F3-3	50-60	32	45	275	320	358	TP0802
BT50-DF4174-260	F4-1	41-54	40	55	260	320	358	TC1102
	F4-2	50-63	40	55	260	320	358	TC1102
	F4-3	61-71	40	55	260	320	358	TC1102
BT50-DF4174-340	F4-1	41-54	40	55	340	400	438	TC1102
	F4-2	50-63	40	55	340	400	438	TC1102
	F4-3	61-71	40	55	340	400	438	TC1102
BT50-DF5395-325	F5-1	53-70	50	65	325	400	438	TC1102
	F5-2	65-82	50	65	325	400	438	TC1102
	F5-3	78-95	50	65	325	400	438	TC1102

## Integral Damping Finishing Boring Tool Holder 阻尼减振精镗刀

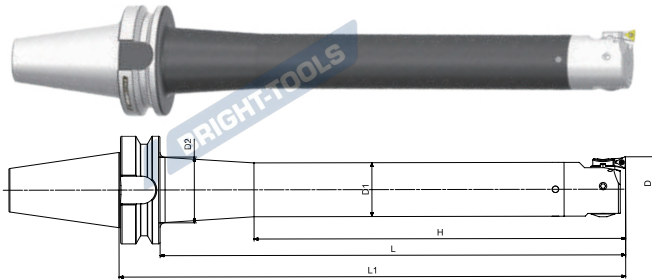

Size	Insert seat	D	D1	D2	H	L	L1	Insert
BT50-DF5395-425	F5-1	53-70	50	65	425	500	538	TC1102
	F5-2	65-82	50	65	425	500	538	TC1102
	F5-3	78-95	50	65	425	500	538	TC1102
BT50-DF68150-420	F6-1	68-100	64	80	420	512	550	TC1102
	F6-2	94-126	64	80	420	512	550	TC1102
	F6-3	118-150	64	80	420	512	550	TC1102
BT50-DF68150-550	F6-1	68-100	64	80	550	640	678	TC1102
	F6-2	94-126	64	80	550	640	678	TC1102
	F6-3	118-150	64	80	550	640	678	TC1102
BT50-DF100203-455	F6-1	100-203	70	85	455	560	598	TC1102
	F6-2	126-179	70	85	455	560	598	TC1102
	F6-3	150-203	70	85	455	560	598	TC1102
BT50-DF100203-595	F6-1	100-203	70	85	595	700	738	TC1102
	F6-2	126-179	70	85	595	700	738	TC1102
	F6-3	150-203	70	85	595	700	738	TC1102