


HYDRAULIC TOOL HOLDERS

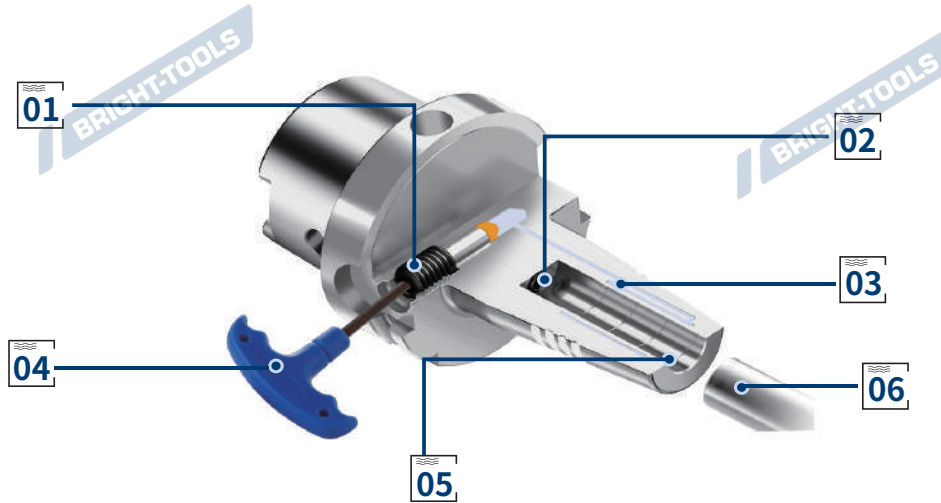

Hydraulic Chuck Construction

液压刀柄构造图

**01 Lock Screw**

Tighten to locking screw to a dead stop.

02 Adjust Screw

To preset cutting tools.

03 Expansion Sleeve and Chamber System

The chamber system fills with hydraulic fluid, exerting a damping effect on the clamped tool.

04 Hex Key

To tighten locking screw for fast cutting tool change.

05 The Grooves

The large clamping pressure creates a displacement of oil, grease, or lubricant residues into the groove, so bore surfaces remains dry.

06 Cutting Tool

The cutting tool is clamped with high run-out.

01 锁紧螺钉

通过锁紧螺钉将液压油压缩到油腔中

02 定位螺钉

用于调节刀具

03 膨胀套和油腔

通过对油腔内液压油施加压力，从而膨胀夹紧刀具

04 内六角扳手

用于锁紧螺钉，实现快速换刀

05 污垢槽

液压刀柄的巨大夹紧压力会导致油、油脂或润滑剂残留物进入凹槽，从而使表面保持干燥。

06 刀具

直接夹持圆柱形刀具



High Precision

The hydraulic chuck is with high precision, which greatly improves the dimensional accuracy, effectively prevents the tool from breaking, and reduces tool wear.

精度高

液压刀柄极高的夹持精度在钻孔和铰孔加工时大大提高孔的尺寸精度并有效防止断刀，在铣削加工中则使多刃刀具各切削刃能够均匀地切入工件，从而改善切削状态，降低刀具磨损。




Large Clamping Force

The special clamping method makes it evenly clamp the cutting tool 360 degrees, with large clamping force, good rigidity, and higher clamping torque.

夹持力大

液压刀柄特殊的夹持方式使之 360 度均匀夹紧刀具，夹持力大，刚性好，能够传递更高的夹持扭矩。



Better Anti-Vibration Result

The damping structure has excellent damping and shock absorption performance. It can reduce the vibration generated in the cutting process and improve the surface quality of the workpiece.

减震效果好

液压刀柄油腔内的油增加结构阻尼，从而改善刀柄夹持的动力学特性，使之具有优良的阻尼减震性能。可以降低切削加工中产生的振动，提高工件的表面质量。



Easy to Install and Remove

Easy to insert and remove the cutting tool by a hex wrench.

装卸简单

液压刀柄装卸刀具非常方便，只要使用一把六角扳手就可以轻松地装卸刀具，不需要任何辅助装置。




Hydraulic Collet

One tool holder can clamp different cutting tool diameters by collets.


适合高速加工

液压刀柄受空腔壁的限制，高速旋转时不产生离心力，适合高速加工。


Milling
铣削

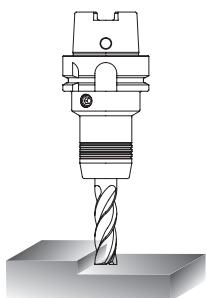


High speed cutting
高速切削




Tapping
攻丝

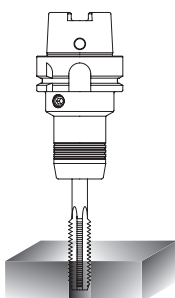


Reaming
铰削

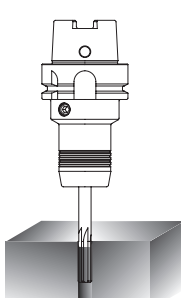

Drilling
钻孔

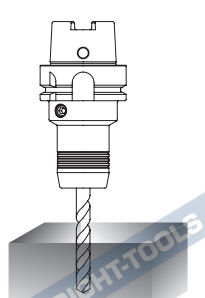

Chamfer
倒角

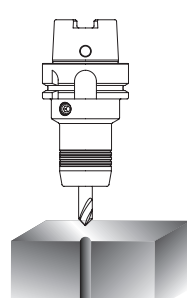

HYDRAULIC TOOLING SYSTEM

HYDRAULIC 工具系统

HYDRO

BT Hydraulic Chuck, Standard	B.06
BT 液压刀柄, 标准型	
BBT Hydraulic Chuck, Standard	B.09
BBT 液压刀柄, 标准型	
SK Hydraulic Chuck, Standard	B.10
SK 液压刀柄, 标准型	
CAT Hydraulic Chuck, Standard	B.12
CAT 液压刀柄, 标准型	B.12
HSK Hydraulic Chuck, Standard	B.13
HSK 液压刀柄, 标准型	
BT Hydraulic Chuck, Short.....	B.17
BT 液压刀柄, 超短型	
SK Hydraulic Chuck, Short.....	B.17
SK 液压刀柄, 超短型	
BT Hydraulic Chuck, Power Design.....	B.18
BT 液压刀柄, 强力型	
SK Hydraulic Chuck, Power Design.....	B.18
SK 液压刀柄, 强力型	
HSK Hydraulic Chuck, Power Design.....	B.19
HSK 液压刀柄, 强力型	
BT Hydraulic Chuck, for Mould.....	B.20
BT 液压刀柄, 模具型	
SK Hydraulic Chuck, for Mould.....	B.21
SK 液压刀柄, 模具型	
HSK Hydraulic Chuck, for Mould.....	B.22
HSK 液压刀柄, 模具型	
BT Hydraulic Chuck, Slim.....	B.23
BT 液压刀柄, 细长型	
SK Hydraulic Chuck, Slim.....	B.24
SK 液压刀柄, 细长型	
CAT Hydraulic Chuck, Slim.....	B.26
CAT 液压刀柄, 细长型	
HSK Hydraulic Chuck, Slim.....	B.30
HSK 液压刀柄, 细长型	
Hydraulic Chuck, Slim.....	B.36
直柄液压刀柄, 细长型	
SK Hydraulic Chuck, for Grind.....	B.37
SK 液压刀柄, 研磨机专用	
MTB Hydraulic Chuck.....	B.37
莫氏液压刀柄	
Hydraulic Chuck For CNC automatic lathe.....	B.38
液压刀柄, 走心机专用	
Hydraulic Collet.....	B.39
液压止水筒夹	
Hydraulic Collet with Coolant Channels.....	B.41
液压筒夹, 端面出水型	
Hydraulic Collet Set	B.43
液压筒夹套装	
Hydraulic Chuck Set	B.44
液压刀柄套装	




Hydraulic Chuck, Standard

液压刀柄, 标准型

HYDRO



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

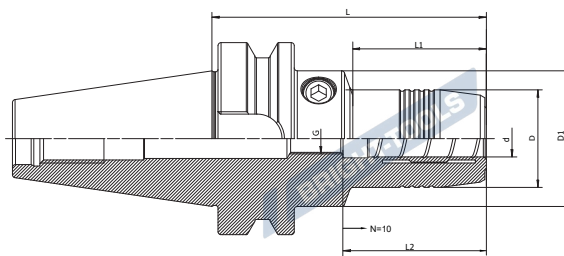


Size	d	D	D1	L	L1	L2	G
BT30-HY06-70	06	28	45	70	29	38	M5
BT30-HY08-70	08	30	45	70	29	38	M6
BT30-HY10-75	10	32	45	75	35	42	M8x1
BT30-HY12-85	12	34	45	85	45	47	M10x1
BT30-HY14-85	14	36	45	85	45	47	M10x1
BT30-HY16-90	16	38	45	90	50.5	50	M10x1
BT30-HY18-90	18	40	45	90	51	50	M10x1
BT30-HY20-90	20	42	45	90	51	52	M10x1
BT40-HY06-65	06	28	50	65	43	38	M5
BT40-HY08-65	08	30	50	65	44.5	38	M6
BT40-HY10-65	10	32	50	65	44.5	42	M8x1
BT40-HY12-65	12	34	50	65	44.5	47	M10x1
BT40-HY14-65	14	36	50	65	44.5	47	M10x1
BT40-HY16-65	16	38	50	65	44.5	50	M12x1
BT40-HY18-65	18	40	50	65	44.5	50	M12x1
BT40-HY20-65	20	42	50	65	45.5	52	M16x1
BT40-HY06-90	06	28	50	90	43	38	M5
BT40-HY08-90	08	30	50	90	44	38	M6
BT40-HY10-90	10	32	50	90	44	42	M8x1
BT40-HY12-90	12	34	50	90	44	47	M10x1
BT40-HY14-90	14	36	50	90	44	47	M10x1
BT40-HY16-90	16	38	50	90	44	50	M12x1
BT40-HY18-90	18	40	50	90	45	50	M12x1
BT40-HY20-90	20	42	50	90	45	52	M12x1
BT40-HY25-100	25	57	62	100	55.5	58	M16x1
BT40-HY32-105	32	64	62	105	62	62	M16x1

Hydraulic Chuck, Standard

液压刀柄, 标准型



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

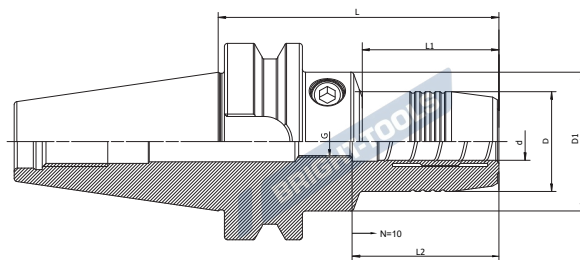

Size	d	D	D1	L	L1	L2	G
BT40-HY06-150	06	28	50	150	103	38	M5
BT40-HY08-150	08	30	50	150	104	38	M6
BT40-HY10-150	10	32	50	150	104	42	M8x1
BT40-HY12-150	12	34	50	150	104	47	M10x1
BT40-HY14-150	14	36	50	150	104	47	M10x1
BT40-HY16-150	16	38	50	150	104.5	50	M12x1
BT40-HY18-150	18	40	50	150	104.5	50	M12x1
BT40-HY20-150	20	42	50	150	105	52	M16x1
BT40-HY25-150	25	57	62	150	104	58	M16x1
BT40-HY32-150	32	64	62	150	106	62	M16x1
BT40-HY06-200	06	28	50	200	153	38	M5
BT40-HY08-200	08	30	50	200	154	38	M6
BT40-HY10-200	10	32	50	200	154	42	M8x1
BT40-HY12-200	12	34	50	200	154	47	M10x1
BT40-HY14-200	14	36	50	200	154	47	M10x1
BT40-HY16-200	16	38	50	200	155	50	M12x1
BT40-HY18-200	18	40	50	200	155	50	M12x1
BT40-HY20-200	20	42	50	200	155	52	M16x1
BT40-HY25-200	25	57	57	200	173	58	M16x1
BT40-HY32-200	32	64	62	200	157	62	M16x1
BT50-HY06-90	06	28	50	90	32	38	M5
BT50-HY08-90	08	30	50	90	32	38	M6
BT50-HY10-90	10	32	50	90	32	42	M8x1
BT50-HY12-90	12	34	50	90	33	47	M10x1
BT50-HY14-90	14	36	50	90	34	47	M10x1
BT50-HY16-90	16	38	50	90	34	50	M12x1
BT50-HY18-90	18	40	50	90	34	50	M12x1
BT50-HY20-90	20	42	50	90	34	52	M16x1
BT50-HY25-105	25	57	70	105	46	58	M16x1
BT50-HY32-115	32	64	70	115	56	62	M16x1


Hydraulic Chuck, Standard

液压刀柄, 标准型

HYDRO



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

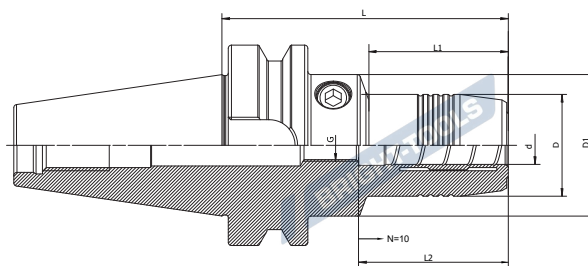


Size	d	D	D1	L	L1	L2	G
BT50-HY06-120	06	28	50	120	40	38	M5
BT50-HY08-120	08	30	50	120	40	38	M6
BT50-HY10-120	10	32	50	120	40	42	M8×1
BT50-HY12-120	12	34	50	120	40	47	M10×1
BT50-HY14-120	14	36	50	120	40	47	M10×1
BT50-HY16-120	16	38	50	120	34	50	M12×1
BT50-HY18-120	18	40	50	120	40	50	M12×1
BT50-HY20-120	20	42	50	120	34	52	M16×1
BT50-HY06-150	06	28	50	150	40	38	M5
BT50-HY08-150	08	30	50	150	40	38	M6
BT50-HY10-150	10	32	50	150	40	42	M8×1
BT50-HY12-150	12	34	50	150	40	47	M10×1
BT50-HY14-150	14	36	50	150	40	47	M10×1
BT50-HY16-150	16	38	50	150	34	50	M12×1
BT50-HY18-150	18	40	50	150	34	50	M12×1
BT50-HY20-150	20	42	50	150	34	52	M16×1
BT50-HY25-150	25	57	70	150	91	58	M16×1
BT50-HY32-150	32	64	70	150	86	62	M16×1

Hydraulic Chuck, Standard

液压刀柄, 标准型



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

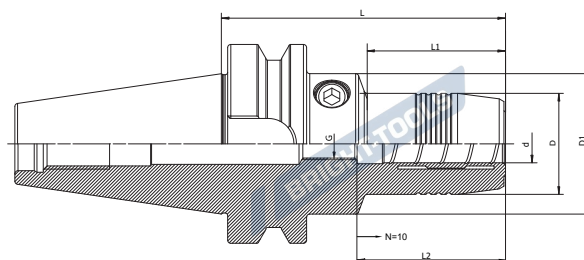

Size	d	D	D1	L	L1	L2	G
BBT40-HY06-90	06	28	50	90	43	38	M5
BBT40-HY08-90	08	30	50	90	44	38	M6
BBT40-HY10-90	10	32	50	90	44	42	M8x1
BBT40-HY12-90	12	34	50	90	44	47	M10x1
BBT40-HY14-90	14	36	50	90	44	47	M10x1
BBT40-HY16-90	16	38	50	90	44	50	M12x1
BBT40-HY18-90	18	40	50	90	45	50	M12x1
BBT40-HY20-90	20	42	50	90	45	52	M12x1
BBT40-HY25-100	25	57	57	100	73	58	M16x1
BBT40-HY32-105	32	64	62	105	62	62	M16x1
BBT50-HY06-90	06	28	50	90	32	38	M5
BBT50-HY08-90	08	30	50	90	32	38	M6
BBT50-HY10-90	10	32	50	90	32	42	M8x1
BBT50-HY12-90	12	34	50	90	33	47	M10x1
BBT50-HY14-90	14	36	50	90	34	47	M10x1
BBT50-HY16-90	16	38	50	90	34	50	M12x1
BBT50-HY18-90	18	40	50	90	34	50	M12x1
BBT50-HY20-90	20	42	50	90	34	52	M16x1
BBT50-HY25-105	25	57	70	105	46	58	M16x1
BBT50-HY32-115	32	64	70	115	56	62	M16x1
BBT50-HY06-120	06	28	50	120	40	38	M5
BBT50-HY08-120	08	30	50	120	40	38	M6
BBT50-HY10-120	10	32	50	120	40	42	M8x1
BBT50-HY12-120	12	34	50	120	40	47	M10x1
BBT50-HY14-120	14	36	50	120	40	47	M10x1
BBT50-HY16-120	16	38	50	120	34	50	M12x1
BBT50-HY18-120	18	40	50	120	34	50	M12x1
BBT50-HY20-120	20	42	50	120	34	52	M16x1

HYDRO


Hydraulic Chuck, Standard

液压刀柄, 标准型

HYDRO



A ↗ ≤0.003	RPM G2.5/25000	AD/B
---------------	-------------------	------

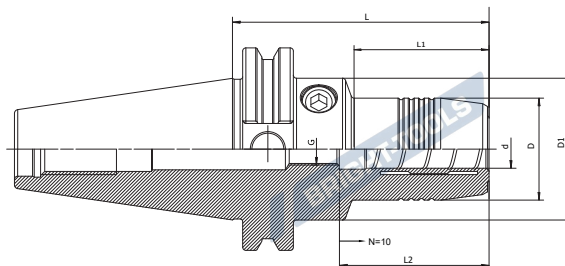


Size	d	D	D1	L	L1	L2	G
SK30-HY06-70	06	28	45	70	30	38	M5
SK30-HY08-70	08	30	45	70	30	38	M6
SK30-HY10-75	10	32	45	75	35.5	42	M8x1
SK30-HY12-85	12	34	45	85	45.5	47	M10x1
SK30-HY14-85	14	36	45	85	45.5	47	M10x1
SK30-HY16-90	16	38	45	90	51.5	50	M10x1
SK30-HY18-90	18	40	45	90	50	50	M10x1
SK30-HY20-90	20	42	45	90	51	52	M10x1
SK40-HY06-65	06	28	50	65	26	38	M5
SK40-HY08-65	08	30	50	65	26	38	M6
SK40-HY10-65	10	32	50	65	26	42	M8x1
SK40-HY12-65	12	34	47.5	65	34	47	M10x1
SK40-HY16-65	16	38	49.2	65	36	50	M12x1
SK40-HY20-65	20	42	49.4	65	38	52	M16x1
SK40-HY06-80.5	06	28	45	80.5	42	38	M5
SK40-HY08-80.5	08	30	45	80.5	42.5	38	M6
SK40-HY10-80.5	10	32	45	80.5	43	42	M8x1
SK40-HY12-80.5	12	34	45	80.5	43	47	M10x1
SK40-HY14-80.5	14	36	45	80.5	43	47	M10x1
SK40-HY16-80.5	16	38	50	80.5	43	50	M12x1
SK40-HY20-80.5	20	42	49	80.5	44	52	M12x1
SK40-HY25-80.5	25	57	68	80.5	26	58	M16x1
SK40-HY32-80.5	32	64	80	80.5	23	62	M16x1
SK40-HY06-110	06	28	45	110	71.5	38	M5
SK40-HY08-110	08	30	45	110	71.5	38	M6
SK40-HY10-110	10	32	45	110	72	42	M8x1
SK40-HY12-110	12	34	45	110	72.5	47	M10x1
SK40-HY16-110	16	38	50	110	72	50	M12x1
SK40-HY20-110	20	42	50	110	73	52	M16x1

Hydraulic Chuck, Standard

液压刀柄, 标准型



A ↗ ≤0.003	RPM G2.5/25000	 AD/B
---------------	-------------------	---

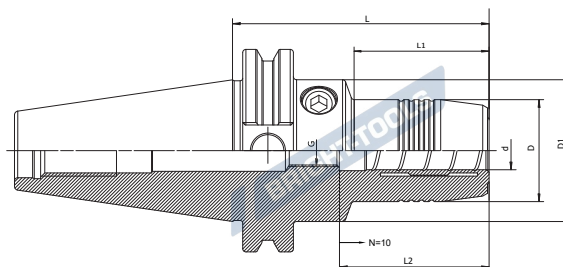


Size	d	D	D1	L	L1	L2	G
SK50-HY06-80.5	06	28	50	80.5	39.5	38	M5
SK50-HY08-80.5	08	30	50	80.5	40	38	M6
SK50-HY10-80.5	10	32	50	80.5	40.5	42	M8x1
SK50-HY12-80.5	12	34	50	80.5	40.5	47	M10x1
SK50-HY16-80.5	16	38	50	80.5	44	50	M12x1
SK50-HY20-80.5	20	42	50	80.5	44	52	M16x1
SK50-HY25-80.5	25	57	70	80.5	44	58	M16x1
SK50-HY32-80.5	32	64	70	80.5	44	62	M16x1
SK50-HY06-110	06	28	50	110	44	38	M5
SK50-HY08-110	08	30	50	110	44	38	M6
SK50-HY10-110	10	32	50	110	44	42	M8x1
SK50-HY12-110	12	34	50	110	44	47	M10x1
SK50-HY16-110	16	38	50	110	44	50	M12x1
SK50-HY20-110	20	42	50	110	44	52	M16x1
SK50-HY25-110	25	27	70	110	70	58	M16x1
SK50-HY06-150	06	28	50	150	44	38	M5
SK50-HY08-150	08	30	50	150	44	38	M6
SK50-HY10-150	10	32	50	150	44	42	M8x1
SK50-HY12-150	12	34	50	150	44	47	M10x1
SK50-HY16-150	16	38	50	150	44	50	M12x1
SK50-HY20-150	20	42	50	150	44	52	M16x1

Hydraulic Chuck, Standard

液压刀柄, 标准型



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

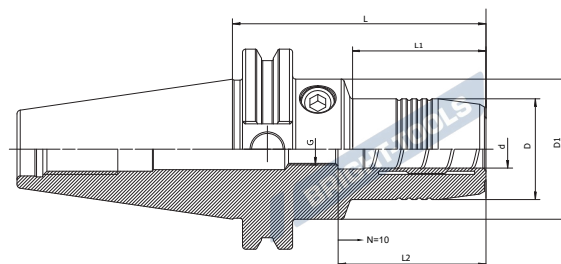


Size	d	D	D1	L	L1	L2	G
CAT40-HY06-81	06	28	44.45	81	30	38	M5
CAT40-HY08-81	08	30	44.45	81	30	38	M6
CAT40-HY10-81	10	32	44.45	81	31	42	M8x1
CAT40-HY12-81	12	34	44.45	81	31.5	47	M10x1
CAT40-HY16-81	16	38	44.45	81	42	50	M12x1
CAT40-HY20-81	20	42	44.45	81	44	52	M12x1
CAT40-HY25-81	25	57	68	81	27	58	M16x1
CAT40-HY32-81	32	64	80	81	24	62	M16x1
CAT40-HY06-110	06	28	44.45	110	29.5	38	M5
CAT40-HY08-110	08	30	44.45	110	30	38	M6
CAT40-HY10-110	10	32	44.45	110	31	42	M8x1
CAT40-HY12-110	12	34	44.45	110	31.5	47	M10x1
CAT40-HY16-110	16	38	44.45	110	33	50	M12x1
CAT40-HY20-110	20	42	44.45	110	34	52	M16x1
CAT50-HY06-81	06	28	69.85	81	30	38	M5
CAT50-HY08-81	08	30	69.85	81	30	38	M6
CAT50-HY10-81	10	32	69.85	81	32	42	M8x1
CAT50-HY12-81	12	34	69.85	81	35	47	M10x1
CAT50-HY16-81	16	38	69.85	81	40	50	M12x1
CAT50-HY20-81	20	42	69.85	81	40	52	M16x1

Hydraulic Chuck, Standard

液压刀柄, 标准型



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

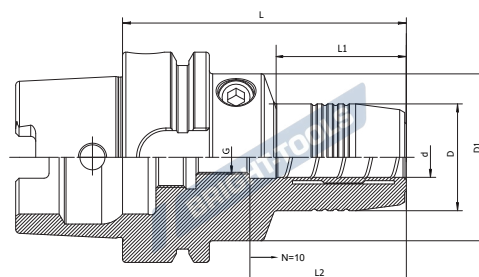


Size	d	D	D1	L	L1	L2	G
HSK32A-HY06-80	06	28	40	80	29	38	M5
HSK32A-HY08-80	08	30	40	80	29	38	M6
HSK32A-HY10-85	10	32	40	85	35	42	M6
HSK32A-HY12-90	12	34	40	90	40	47	M6
HSK40A-HY06-70	06	28	34	70	36	38	M5
HSK40A-HY08-70	08	30	34	70	36	38	M6
HSK40A-HY10-75	10	32	34	75	42	42	M6
HSK40A-HY12-80	12	34	34	80	48	47	M6
HSK50A-HY06-70	06	28	41	70	27.5	38	M5
HSK50A-HY08-70	08	30	41	70	28	38	M6
HSK50A-HY10-75	10	32	41	75	34.5	42	M6
HSK50A-HY12-85	12	34	41	85	43.5	47	M8×1
HSK50A-HY14-85	14	36	41	85	43.5	47	M8×1
HSK50A-HY16-90	16	38	53	90	30	50	M8×1
HSK50A-HY18-90	18	40	57	90	30	50	M8×1
HSK50A-HY20-90	20	42	60	90	28	52	M8×1
HSK63A-HY06-70	06	28	50	70	24	38	M5
HSK63A-HY08-70	08	30	50	70	24	38	M6
HSK63A-HY10-80	10	32	50	80	35	42	M8x1
HSK63A-HY12-85	12	34	50	85	40	47	M10x1
HSK63A-HY14-85	14	36	50	85	40	47	M10×1
HSK63A-HY16-90	16	38	50	90	45	50	M10×1
HSK63A-HY18-90	18	40	50	90	46	50	M10×1
HSK63A-HY20-90	20	42	50	90	46	52	M10×1
HSK63A-HY25-120	25	57	52	120	75.5	58	M16×1
HSK63A-HY32-125	32	64	52	125	83	62	M16×1

HYDRO

Hydraulic Chuck, Standard

液压刀柄, 标准型

HYDRO

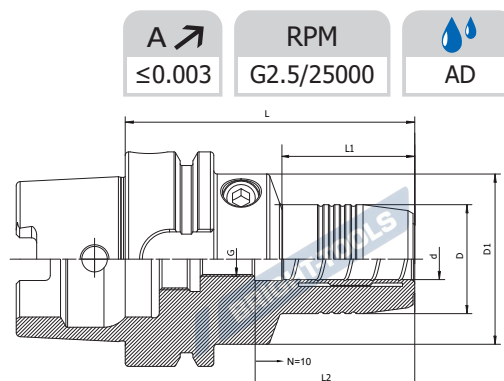


Size	d	D	D1	L	L1	L2	G
HSK63A-HY06-150	06	28	50	150	104	38	M5
HSK63A-HY08-150	08	30	50	150	104	38	M6
HSK63A-HY10-150	10	32	50	150	105	42	M8x1
HSK63A-HY12-150	12	34	50	150	105	47	M10x1
HSK63A-HY14-150	14	36	50	150	105	47	M10x1
HSK63A-HY16-150	16	38	50	150	105	50	M12x1
HSK63A-HY18-150	18	40	50	150	106	50	M12x1
HSK63A-HY20-150	20	42	50	150	106	52	M16x1
HSK63A-HY25-150	25	57	62	150	88	58	M16x1
HSK63A-HY32-150	32	64	70	150	88	62	M16x1
HSK63A-HY06-200	06	28	50	200	154	38	M5
HSK63A-HY08-200	08	30	50	200	154	38	M6
HSK63A-HY10-200	10	32	50	200	155	42	M8x1
HSK63A-HY12-200	12	34	50	200	155	47	M10x1
HSK63A-HY14-200	14	36	50	200	155	47	M10x1
HSK63A-HY16-200	16	38	50	200	156	50	M12x1
HSK63A-HY18-200	18	40	50	200	156	50	M12x1
HSK63A-HY20-200	20	42	50	200	156	52	M16x1
HSK63A-HY25-200	25	57	52	200	155.5	58	M16x1
HSK63A-HY32-200	32	64	70	200	156	62	M16x1
HSK80A-HY06-80	06	28	50	80	33	38	M5
HSK80A-HY12-95	12	34	50	95	49	47	M10x1
HSK80A-HY14-100	14	36	50	100	54.5	47	M10x1
HSK80A-HY16-100	16	38	50	100	55	50	M12x1
HSK80A-HY20-105	20	42	50	105	61	52	M12x1
HSK80A-HY25-110	25	57	63	110	64.5	58	M16x1
HSK80A-HY32-100	32	64	67	100	55	62	M10x1

Hydraulic Chuck, Standard

液压刀柄, 标准型



A ↗ ≤0.003	RPM G2.5/25000	 AD
---------------	-------------------	---

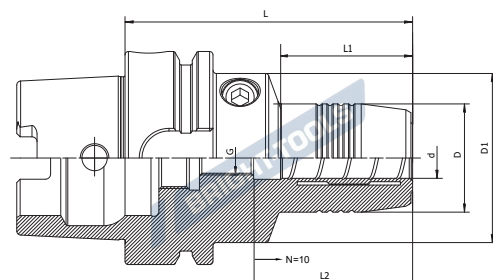

Size	d	D	D1	L	L1	L2	G
HSK100A-HY06-75	06	28	50	75	26	38	M5
HSK100A-HY08-75	08	30	50	75	26	38	M6
HSK100A-HY10-90	10	32	50	90	42	42	M8x1
HSK100A-HY12-95	12	34	50	95	47	47	M10x1
HSK100A-HY14-95	14	36	50	95	47	47	M10x1
HSK100A-HY16-100	16	38	50	100	52	50	M12x1
HSK100A-HY18-100	18	40	50	100	53	50	M12x1
HSK100A-HY20-105	20	42	60	105	54	52	M16x1
HSK100A-HY25-110	25	57	70	110	60	58	M16x1
HSK100A-HY32-110	32	64	70	110	61.5	62	M16x1
HSK100A-HY06-150	06	28	50	150	101	38	M5
HSK100A-HY08-150	08	30	50	150	101	38	M6
HSK100A-HY10-150	10	32	50	150	102	42	M8x1
HSK100A-HY12-150	12	34	50	150	102	47	M10x1
HSK100A-HY14-150	14	36	50	150	102	47	M10x1
HSK100A-HY16-150	16	38	50	150	102	50	M12x1
HSK100A-HY18-150	18	40	50	150	103	50	M12x1
HSK100A-HY20-150	20	42	60	150	99	52	M16x1
HSK100A-HY25-150	25	57	70	150	100	58	M16x1
HSK100A-HY32-150	32	64	70	150	101	62	M16x1
HSK100A-HY06-200	06	28	50	200	151	38	M5
HSK100A-HY08-200	08	30	50	200	151	38	M6
HSK100A-HY10-200	10	32	50	200	152	42	M8x1
HSK100A-HY12-200	12	34	50	200	152	47	M10x1
HSK100A-HY14-200	14	36	50	200	152	47	M10x1
HSK100A-HY16-200	16	38	50	200	152	50	M12x1
HSK100A-HY18-200	18	40	50	200	152	50	M12x1
HSK100A-HY20-200	20	42	60	200	152	52	M16x1
HSK100A-HY25-200	25	57	62	200	152	58	M16x1
HSK100A-HY32-200	32	64	70	200	152	62	M16x1
HSK125A-HY20-115	20	42	-	115	66	52	M16x1
HSK125A-HY32-125	32	64	-	125	76	62	M16x1


Hydraulic Chuck, Standard

液压刀柄, 标准型

HYDRO



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

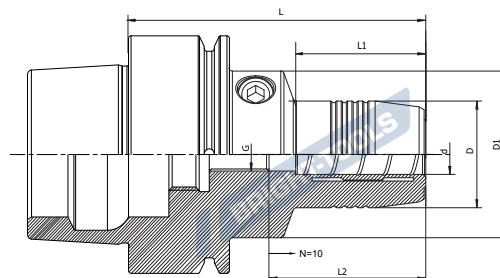


Size	d	D	D1	L	L1	L2	G
HSK40E-HY06-70	06	28	34	70	36	38	M5
HSK40E-HY08-70	08	30	34	70	36	38	M6
HSK40E-HY10-75	10	32	34	75	42	42	M6
HSK40E-HY12-80	12	34	34	80	48	47	M6
HSK50E-HY06-70	06	28	41	70	27.5	38	M5
HSK50E-HY08-70	08	30	41	70	28	38	M6
HSK50E-HY10-75	10	32	41	75	34.5	42	M6
HSK50E-HY12-85	12	34	42	85	41	47	M8x1
HSK50E-HY16-90	16	38	53	90	30	50	M8x1
HSK50E-HY20-90	20	42	60	90	28	52	M8x1

Hydraulic Chuck, Standard

液压刀柄, 标准型



A ↗ ≤0.003	RPM G2.5	AD
---------------	-------------	----

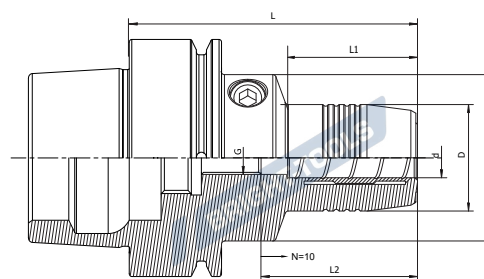


Size	d	D	D1	L	L1	L2	G
HSK63F-HY06-70	06	28	50	70	24	38	M5
HSK63F-HY08-70	08	30	50	70	24	38	M6
HSK63F-HY10-80	10	32	50	80	35	42	M8×1
HSK63F-HY12-85	12	34	50	85	40	47	M10×1
HSK63F-HY14-85	14	36	50	85	40	47	M10×1
HSK63F-HY16-90	16	38	50	90	45	50	M12×1
HSK63F-HY18-90	18	40	50	90	46	50	M12×1
HSK63F-HY20-90	20	42	50	90	46	52	M12×1
HSK63F-HY25-120	25	57	52.5	120	78	58	M16×1
HSK63F-HY32-125	32	64	52	125	79.5	62	M16×1

Hydraulic Chuck, Short

液压刀柄, 超短型



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----



Size	d1	D1	L	L1	L2	G
BT40-HY20-32.5	20	50	32.5	5.5	52	M12x1
BT50-HY20-40	20	39	40	2	52	M16x1

HYDRO


Tool Holder DIN 69871

Hydraulic Chuck, Short

液压刀柄, 超短型



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----




Size	d1	D1	D2	L	L1	L2	G
SK40-HY20-24.6	20	34	49.5	24.6	5.5	52	-
SK50-HY32-30.9	32	44.5	70.5	30.9	11.85	62	-

Hydraulic Chuck, Power Design

液压刀柄, 强力型

A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

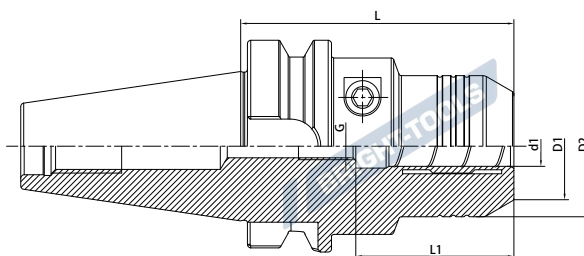


Size	d1	D1	D2	L	L1	G
BT30-HYP12-69	12	34	42	69	41	M8x1
BT30-HYP20-90	20	38	42	90	48	M8x1
BT40-HYP12-58	12	34	42	58	41	M8x1
BT40-HYP20-72.5	20	38	49.25	72.5	48	M8x1
BT50-HYP20-83.5	20	38	49.25	83.5	48	M8x1
BT50-HYP32-90	32	58.5	72	90	57	M8x1

Tool Holder DIN 69871

Hydraulic Chuck, Power Design

液压刀柄, 强力型

A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

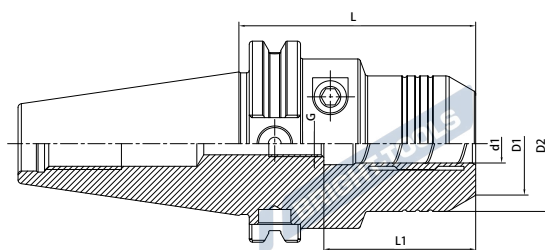

Size	d1	D1	D2	L	L1	G
SK40-HYP12-50	12	34	42	50	41	M8x1
SK40-HYP20-64.5	20	38	49.5	64.5	48	M8x1
SK50-HYP20-64.5	20	38	49.5	64.5	48	M8x1
SK50-HYP32-81	32	58.5	72	81	57	M8x1


Hydraulic Chuck, Power Design

液压刀柄, 强力型

A ↗
≤0.003

RPM
G2.5/25000

AD

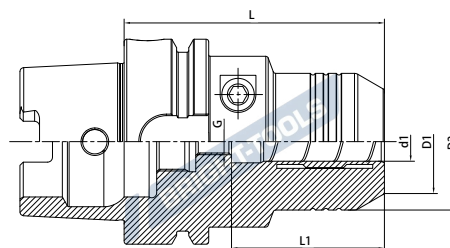


Size	d1	D1	D2	L	L1	G
HSK63A-HYP12-80	12	32	42	80	47	M8x1
HSK63A-HYP20-80	20	40	52.5	80	52	M8x1
HSK100A-HYP20-90	20	38	52.5	90	48	M8x1
HSK100A-HYP32-100	32	58.5	72	100	57	M8x1

HYDRO

Hydraulic Chuck, External Expansion

液压刀柄，外胀型

A ↗	RPM	
≤0.003	G2.5/25000	AD

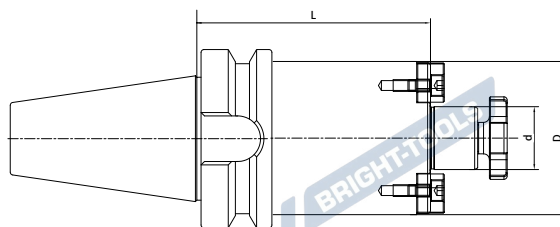


Size	d	D	L
BT40-HYFM22-100	22	50	100
BT40-HYFM27-100	27	60	100
BT40-HYFM32-100	32	78	100
BT40-HYFM40-100	40	89	100
BT50-HYFM22-100	22	50	100
BT50-HYFM27-100	27	60	100
BT50-HYFM32-100	32	78	100
BT50-HYFM40-100	40	89	100

TOOL HOLDER JIS B 6339

Hydraulic Chuck, External Expansion

液压刀柄，外胀型

A ↗	RPM	
≤0.003	G2.5/25000	AD

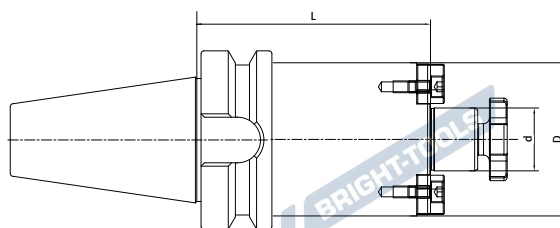


Size	d	D	L
BBT40-HYFM22-100	22	50	100
BBT40-HYFM27-100	27	60	100
BBT40-HYFM32-100	32	78	100
BBT40-HYFM40-100	40	89	100
BBT50-HYFM22-100	22	50	100
BBT50-HYFM27-100	27	60	100
BBT50-HYFM32-100	32	78	100
BBT50-HYFM40-100	40	89	100

Hydraulic Chuck, External Expansion

液压刀柄, 外胀型

A ↗	RPM	
≤0.003	G2.5/25000	AD

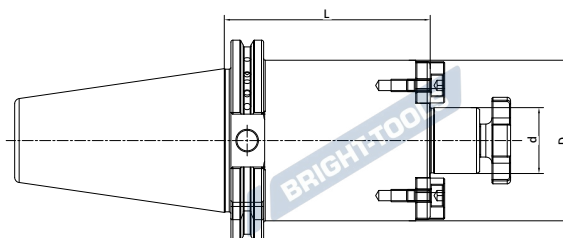


Size	d	D	L
SK40-HYFM22-100	22	50	100
SK40-HYFM27-100	27	60	100
SK40-HYFM32-100	32	78	100
SK40-HYFM40-100	40	89	100
SK50-HYFM22-100	22	50	100
SK50-HYFM27-100	27	60	100
SK50-HYFM32-100	32	78	100
SK50-HYFM40-100	40	89	100

DIN 69893 (ISO 12164) HSK-A

Hydraulic Chuck, External Expansion

液压刀柄, 外胀型

A ↗	RPM	
≤0.003	G2.5/25000	AD

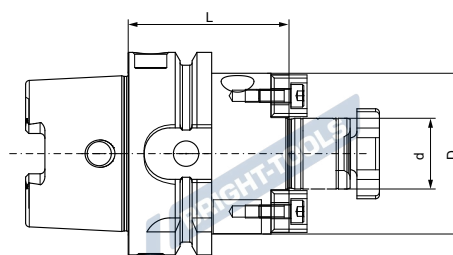


Size	d	D	L
HSK63A-HYFM22-100	22	50	100
HSK63A-HYFM27-100	27	60	100
HSK63A-HYFM32-100	32	78	100
HSK63A-HYFM40-100	40	89	100
HSK100A-HYFM22-100	22	50	100
HSK100A-HYFM27-100	27	60	100
HSK100A-HYFM32-100	32	78	100
HSK100A-HYFM40-100	40	89	100

Hydraulic Chuck, for Mould

液压刀柄，模具型

A ↗	RPM	
≤0.003	G2.5/25000	AD

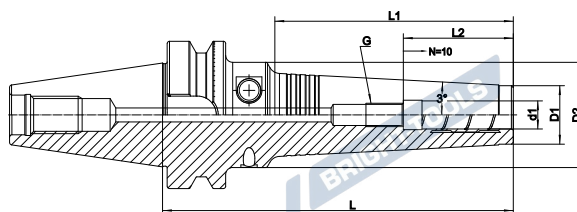


Size	d1	D1	D2	L	L1	L2	G
BT40-HYM06-120	06	20	45	120	70	38	M5
BT40-HYM06-150	06	20	45	150	100	38	M5
BT40-HYM08-120	08	22	45	120	70	38	M6
BT40-HYM08-150	08	22	45	150	100	38	M6
BT40-HYM10-120	10	24	45	120	70	42	M8×1
BT40-HYM10-150	10	24	45	150	100	42	M8×1
BT40-HYM12-120	12	25	45	120	70	47	M10×1
BT40-HYM12-150	12	25	45	150	100	47	M10×1
BT40-HYM16-120	16	32	45	120	70	50	M12×1
BT40-HYM16-150	16	32	45	150	100	50	M12×1
BT40-HYM20-120	20	34	43.8	120	93	52	M16×1
BT40-HYM20-150	20	34	46.9	150	123	52	M16×1
BT50-HYM06-150	06	20	50	150	90	38	M5
BT50-HYM08-150	08	22	50	150	90	38	M6
BT50-HYM10-150	10	24	50	150	90	42	M8×1
BT50-HYM12-150	12	25	50	150	90	47	M10×1
BT50-HYM16-150	16	32	50	150	90	50	M12×1
BT50-HYM20-150	20	34	50	150	94	52	M16×1

Hydraulic Chuck, for Mould

液压刀柄，模具型

A ↗	RPM	AD
≤0.003	G2.5/25000	

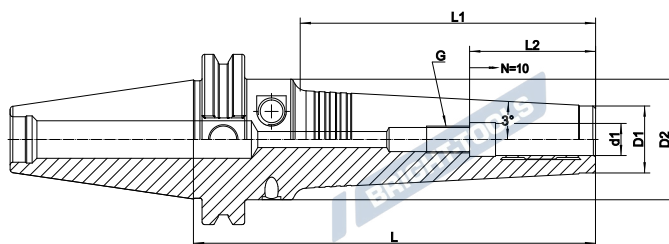

Size	d1	D1	D2	L	L1	L2	G
SK40-HYM06-120	06	20	45	120	80.7	38	M5
SK40-HYM06-150	06	20	49.5	150	100	38	M5
SK40-HYM08-120	08	22	49.5	120	70	38	M6
SK40-HYM08-150	08	22	49.5	150	100	38	M6
SK40-HYM10-120	10	24	45	120	80.7	42	M8×1
SK40-HYM10-150	10	24	44.5	150	100	42	M8×1
SK40-HYM12-120	12	25	44.5	120	70	47	M10×1
SK40-HYM12-150	12	25	45	150	110.7	47	M10×1
SK40-HYM16-120	16	32	49.5	120	81.6	50	M12×1
SK40-HYM16-150	16	32	49.5	150	100	50	M12×1
SK40-HYM20-120	20	34	49.5	120	81.7	52	M16×1
SK40-HYM20-150	20	34	49.5	150	100	52	M16×1
SK50-HYM06-150	06	20	44.5	150	100	38	M5
SK50-HYM08-150	08	22	44.5	150	100	38	M6
SK50-HYM10-150	10	24	44.5	150	100	42	M8×1
SK50-HYM12-150	12	25	44.5	150	100	47	M10×1
SK50-HYM16-150	16	32	44.5	150	100	50	M12×1
SK50-HYM20-150	20	34	44.5	150	100	52	M16×1


Hydraulic Chuck, for Mould

液压刀柄，模具型

A ↗
≤0.003

RPM
G2.5/25000

AD

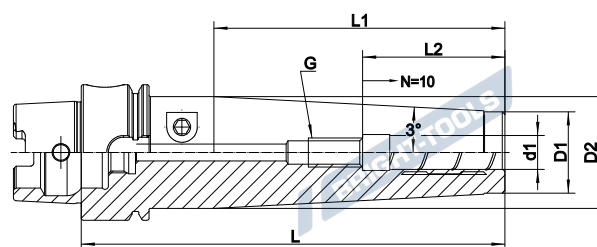


Size	d1	D1	D2	L	L1	L2	G
HSK63A-HYM06-145	06	20	50	145	90	38	M5
HSK63A-HYM08-145	08	22	50	145	90	38	M6
HSK63A-HYM10-145	10	24	50	145	90	42	M8×1
HSK63A-HYM12-145	12	25	50	145	90	47	M10×1
HSK63A-HYM16-145	16	32	50	145	90	50	M12×1
HSK63A-HYM20-145	20	34	50	145	90	52	M16×1
HSK100A-HYM06-150	06	20	50	150	90	38	M5
HSK100A-HYM08-150	08	22	50	150	90	38	M6
HSK100A-HYM10-150	10	24	50	150	90	42	M8×1
HSK100A-HYM12-150	12	25	50	150	90	47	M10×1
HSK100A-HYM16-150	16	32	50	150	90	50	M12×1
HSK100A-HYM20-150	20	34	50	150	90	52	M16×1

Hydraulic Chuck, Slim 液压刀柄, 细长型



A ↗ ≤0.003	RPM G2.5/25000	AD
---------------	-------------------	----

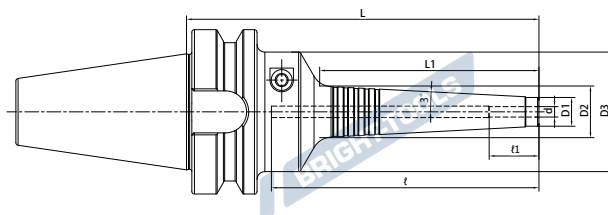


Size	d	L	L1	D1	D2	D3	l	l1
BT30-HYS03-70	03	70	28	11	14.0	46	93	16
BT30-HYS03-85	03	85	37	11	14.9	46	108	16
BT30-HYS03-130	03	130	84	11	19.9	46	153	16
BT30-HYS04-70	04	70	28	11	14.0	46	93	19
BT30-HYS04-85	04	85	37	11	14.9	46	108	19
BT30-HYS04-130	04	130	84	11	19.9	46	153	19
BT30-HYS06-90	06	90	38	13	17.0	46	58	27
BT30-HYS06-135	06	135	84	13	21.9	46	92	27
BT30-HYS06-150	06	150	99	13	23.4	46	107	27
BT30-HYS06-165	06	165	114	13	25.0	46	122	27
BT30-HYS06-180	06	180	130	13	26.7	46	137	27
BT30-HYS08-90	08	90	38	15	19.0	46	58	27
BT30-HYS08-135	08	135	84	15	23.9	46	92	27
BT30-HYS08-150	08	150	99	15	25.4	46	107	27
BT30-HYS08-165	08	165	114	15	27.0	46	122	27
BT30-HYS08-180	08	180	130	15	28.7	46	137	27
BT30-HYS10-105	10	105	53	17	22.6	46	73	33
BT30-HYS10-135	10	135	84	17	25.9	46	92	33
BT30-HYS10-150	10	150	99	17	27.4	46	107	33
BT30-HYS10-165	10	165	114	17	29.0	46	122	33
BT30-HYS10-180	10	180	130	17	30.7	46	137	33
BT30-HYS12-105	12	105	53	19	24.6	46	73	36
BT30-HYS12-135	12	135	84	19	27.9	46	92	36
BT30-HYS12-150	12	150	99	19	29.4	46	107	36
BT30-HYS12-165	12	165	114	19	31.0	46	122	36
BT30-HYS12-180	12	180	130	19	32.7	46	137	36

Hydraulic Chuck, Slim 液压刀柄, 细长型

A ↗
≤0.003

RPM
G2.5/25000

AD

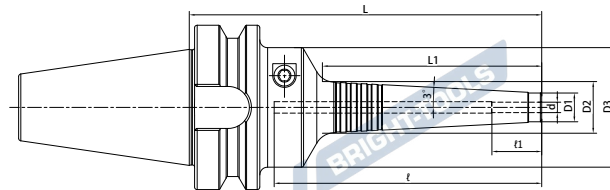


Size	d	L	L1	D1	D2	D3	l	l1
BT40-HYS03-75	03	75	28	11	14.0	46	110	16
BT40-HYS03-90	03	90	37	11	14.9	46	125	16
BT40-HYS03-135	03	135	84	11	19.9	46	170	16
BT40-HYS04-75	04	75	28	11	14.0	46	110	19
BT40-HYS04-90	04	90	37	11	14.9	46	125	19
BT40-HYS04-135	04	135	84	11	19.9	46	170	19
BT40-HYS06-90	06	90	38	13	17.0	46	53	27
BT40-HYS06-135	06	135	84	13	21.9	46	92	27
BT40-HYS06-150	06	150	99	13	23.4	46	107	27
BT40-HYS06-165	06	165	114	13	25.0	46	122	27
BT40-HYS06-180	06	180	130	13	26.7	46	137	27
BT40-HYS08-90	08	90	38	15	19.0	46	53	27
BT40-HYS08-135	08	135	84	15	23.9	46	92	27
BT40-HYS08-150	08	150	99	15	25.4	46	107	27
BT40-HYS08-165	08	165	114	15	27.0	46	122	27
BT40-HYS08-180	08	180	130	15	28.7	46	137	27
BT40-HYS10-105	10	105	53	17	22.6	46	68	33
BT40-HYS10-135	10	135	84	17	25.9	46	92	33
BT40-HYS10-150	10	150	99	17	27.4	46	107	33
BT40-HYS10-165	10	165	114	17	29.0	46	122	33
BT40-HYS10-180	10	180	130	17	30.7	46	137	33
BT40-HYS12-135	12	135	84	19	27.9	46	92	36
BT40-HYS12-150	12	150	99	19	29.4	46	107	36
BT40-HYS12-165	12	165	114	19	31.0	46	122	36
BT40-HYS12-180	12	180	130	19	32.7	46	137	36
BT40-HYS16-135	16	135	84	23	31.9	52.5	91	40
BT40-HYS16-165	16	165	114	23	35.0	52.5	120	40
BT40-HYS16-180	16	180	129	23	36.6	52.5	135	40
BT40-HYS20-135	20	135	84	28	36.9	60	91	40
BT40-HYS20-165	20	165	114	28	40	60	120	40
BT40-HYS20-180	20	180	129	28	41.6	60	135	40
BT40-HYS25-135	25	135	84	37	45.9	60	91	50
BT40-HYS25-165	25	165	114	37	49.0	60	120	50
BT40-HYS25-180	25	180	129	37	50.6	60	135	50

Hydraulic Chuck, Slim 液压刀柄, 细长型

A ↗
≤0.003

RPM
G2.5/25000

AD

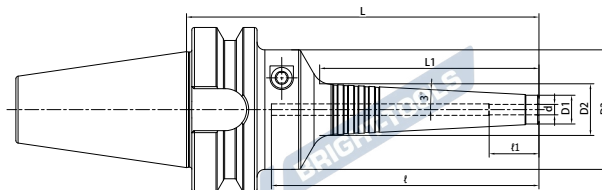


Size	d	L	L1	D1	D2	D3	l	l1
BT50-HYS06-105	06	105	38	13	17.0	46	53	27
BT50-HYS06-150	06	150	84	13	21.9	46	92	27
BT50-HYS06-165	06	165	99	13	23.4	46	107	27
BT50-HYS06-180	06	180	114	13	25.0	46	122	27
BT50-HYS06-195	06	195	130	13	26.7	46	137	27
BT50-HYS08-105	08	105	38	15	19.0	46	53	27
BT50-HYS08-150	08	150	84	15	23.9	46	92	27
BT50-HYS08-165	08	165	99	15	25.4	46	107	27
BT50-HYS08-180	08	180	114	15	27.0	46	122	27
BT50-HYS08-195	08	195	130	15	28.7	46	137	27
BT50-HYS10-150	10	150	84	17	25.9	46	92	33
BT50-HYS10-165	10	165	99	17	27.4	46	107	33
BT50-HYS10-180	10	180	114	17	29.0	46	122	33
BT50-HYS10-195	10	195	130	17	30.7	46	137	33
BT50-HYS12-150	12	150	84	19	27.9	46	92	36
BT50-HYS12-165	12	165	99	19	29.4	46	107	36
BT50-HYS12-180	12	180	114	19	31.0	46	122	36
BT50-HYS12-195	12	195	130	19	32.7	46	137	36
BT50-HYS16-150	16	150	84	23	31.9	52.5	91	40
BT50-HYS16-180	16	180	114	23	35.0	52.5	120	40
BT50-HYS16-195	16	195	129	23	36.6	52.5	135	40
BT50-HYS20-150	20	150	84	28	36.9	60	91	40
BT50-HYS20-180	20	180	114	28	40.0	60	120	40
BT50-HYS20-195	20	195	129	28	41.6	60	135	40
BT50-HYS25-150	25	150	84	37	45.9	60	91	50
BT50-HYS25-180	25	180	114	37	49.0	60	120	50
BT50-HYS25-195	25	195	129	37	50.6	60	135	50

Hydraulic Chuck, Slim 液压刀柄，细长型

HYDRO





A ↗	RPM	AD
≤0.003	G2.5/25000	

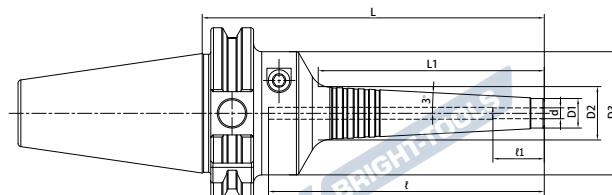

Size	d	D1	D2	D3	L	L1	L0	l1	l
SK40-HYS03-75	03	11	13.0	46	75	19	-	18	110
SK40-HYS03-90	03	11	14.2	46	90	30	-	18	125
SK40-HYS03-135	03	11	18.5	46	135	71	-	18	170
SK40-HYS04-75	04	11	13.0	46	75	19	-	24	110
SK40-HYS04-90	04	11	14.2	46	90	30	-	24	125
SK40-HYS04-135	04	11	18.5	46	135	71	-	24	170
SK40-HYS06-90	06	13	15.8	46	90	26	-	29	125
SK40-HYS06-135	06	13	20.5	46	135	71	-	29	170
SK40-HYS06-150	06	13	22.2	46	150	87	-	29	185
SK40-HYS06-165	06	13	23.7	46	165	102	-	29	200
SK40-HYS06-180	06	13	25.4	46	180	118	-	29	215
SK40-HYS08-90	08	15	17.9	46	90	27	-	29	125
SK40-HYS08-135	08	15	22.6	46	135	72	-	29	170
SK40-HYS08-150	08	15	24.2	46	150	87	-	29	185
SK40-HYS08-165	08	15	25.8	46	165	103	-	29	200
SK40-HYS08-180	08	15	27.4	46	180	118	-	29	215
SK40-HYS10-90	10	17	20.4	46	90	32	-	40	125
SK40-HYS10-135	10	17	24.6	46	135	72	-	40	170
SK40-HYS10-150	10	17	26.3	46	150	87	-	40	185
SK40-HYS10-165	10	17	27.8	46	165	103	-	40	200
SK40-HYS10-180	10	17	29.5	46	180	119	-	40	215
SK40-HYS12-90	12	19	22.5	46	90	33	-	40	125
SK40-HYS12-135	12	19	26.7	46	135	73	-	40	170
SK40-HYS12-150	12	19	28.3	46	150	88	-	40	185
SK40-HYS12-165	12	19	30.0	46	165	104	-	40	200
SK40-HYS12-180	12	19	31.5	46	180	119	-	40	215
SK40-HYS16-135	16	23	30.6	525	135	72	35	40	90
SK40-HYS16-165	16	23	33.8	525	165	103	35	40	120
SK40-HYS16-180	16	23	35.5	525	180	119	35	40	135
SK40-HYS20-150	20	28	34.7	62	150	63	35	40	85
SK40-HYS20-180	20	28	37.8	62	180	93	35	40	115
SK40-HYS20-195	20	28	39.5	62	195	109	35	40	130
SK40-HYS25-150	25	37	43.9	62	150	65	35	50	85
SK40-HYS25-180	25	37	47.1	62	180	96	35	50	115
SK40-HYS25-195	25	37	48.8	62	195	112	35	50	130

Hydraulic Chuck, Slim 液压刀柄, 细长型

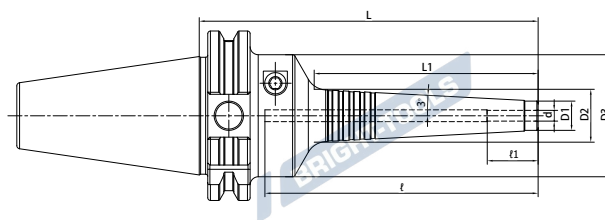


Size	d	D1	D2	D3	L	L1	l1	l
SK50-HYS06-105	06	13	15.8	46	105	26	29	161
SK50-HYS06-150	06	13	20.5	46	150	71	29	206
SK50-HYS06-165	06	13	22.2	46	165	87	29	221
SK50-HYS06-180	06	13	23.7	46	180	102	29	236
SK50-HYS06-195	06	13	25.4	46	195	118	29	251
SK50-HYS08-105	08	15	17.8	46	105	27	29	160
SK50-HYS08-150	08	15	22.5	46	150	72	29	205
SK50-HYS08-165	08	15	24.1	46	165	87	29	220
SK50-HYS08-180	08	15	25.8	46	180	103	29	235
SK50-HYS08-195	08	15	27.4	46	195	118	29	250
SK50-HYS10-150	10	17	24.6	46	150	72	40	205
SK50-HYS10-165	10	17	26.1	46	165	87	40	220
SK50-HYS10-180	10	17	27.8	46	180	103	40	235
SK50-HYS10-195	10	17	29.5	46	195	119	40	250
SK50-HYS12-150	12	19	26.7	46	150	73	40	205
SK50-HYS12-165	12	19	28.2	46	165	88	40	220
SK50-HYS12-180	12	19	29.9	46	180	104	40	235
SK50-HYS12-195	12	19	31.5	46	195	119	40	250
SK50-HYS16-150	16	23	30.5	52.5	150	72	40	90
SK50-HYS16-180	16	23	33.8	52.5	180	103	40	120
SK50-HYS16-195	16	23	34.6	52.5	195	119	40	135
SK50-HYS20-150	20	28	34.6	62	150	63	40	85
SK50-HYS20-180	20	28	37.7	62	180	93	40	115
SK50-HYS20-195	20	28	39.4	62	195	109	40	130
SK50-HYS25-150	25	37	43.6	62	150	65	50	85
SK50-HYS25-180	25	37	47.1	62	180	96	50	115
SK50-HYS25-195	25	37	48.7	62	195	112	50	130

Hydraulic Chuck, Slim 液压刀柄, 细长型

A ↗
≤0.003

RPM
G2.5/25000

AD

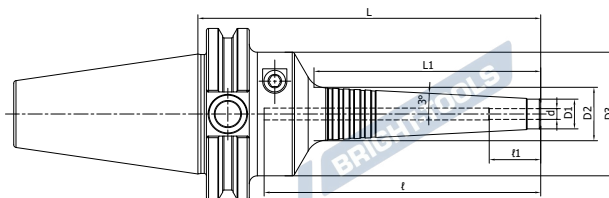

Size	d	L	L1	D1	D2	D3	l	l1
CAT40-HYS03-75	03	75	28	11	14	46	110	16
CAT40-HYS03-90	03	90	37	11	14.9	46	125	16
CAT40-HYS03-135	03	135	84	11	19.9	46	170	16
CAT40-HYS04-75	04	75	28	11	14	46	110	19
CAT40-HYS04-90	04	90	37	11	14.9	46	125	19
CAT40-HYS04-135	04	135	84	11	19.9	46	170	19
CAT40-HYS06-90	06	90	38	13	17	46	53	27
CAT40-HYS06-150	06	150	84	13	21.9	46	92	27
CAT40-HYS06-165	06	165	99	13	23.4	46	107	27
CAT40-HYS06-180	06	180	114	13	25	46	122	27
CAT40-HYS06-195	06	195	130	13	26.7	46	137	27
CAT40-HYS08-90	08	90	38	15	19	46	53	27
CAT40-HYS08-150	08	150	84	15	23.9	46	92	27
CAT40-HYS08-165	08	165	99	15	25.4	46	107	27
CAT40-HYS08-180	08	180	114	15	27	46	122	27
CAT40-HYS08-195	08	195	130	15	28.7	46	137	27
CAT40-HYS10-105	10	105	53	17	22.6	46	68	33
CAT40-HYS10-150	10	150	84	17	25.9	46	92	33
CAT40-HYS10-165	10	165	99	17	27.4	46	107	33
CAT40-HYS10-180	10	180	114	17	29	46	122	33
CAT40-HYS10-195	10	195	130	17	30.7	46	137	33
CAT40-HYS12-105	12	105	53	19	24.6	46	68	36
CAT40-HYS12-150	12	150	84	19	27.9	46	92	36
CAT40-HYS12-165	12	165	99	19	29.4	46	107	36
CAT40-HYS12-180	12	180	114	19	31	46	122	36
CAT40-HYS12-195	12	195	130	19	32.7	46	137	36
CAT40-HYS16-150	16	150	84	23	31.9	52.5	91	40
CAT40-HYS16-180	16	180	114	23	35	52.5	120	40
CAT40-HYS16-195	16	195	129	23	38.6	52.5	135	40
CAT40-HYS20-150	20	150	84	28	36.9	60	91	40
CAT40-HYS20-180	20	180	114	28	40	60	120	40
CAT40-HYS20-195	20	195	129	28	41	60	135	40
CAT40-HYS25-150	25	150	84	37	45.9	60	91	50
CAT40-HYS25-180	25	180	114	37	49	60	120	50
CAT40-HYS25-195	25	195	129	37	50.6	60	135	50


Hydraulic Chuck, Slim

液压刀柄, 细长型

A ↗
≤0.003

RPM
G2.5/25000

AD

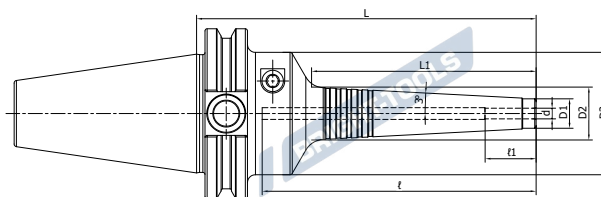

Size	d	L	L1	L2	D1	D2	D3	l	l1
CAT50-HYS06-150	06	150	84	115	13	21.9	46	92	27
CAT50-HYS06-195	06	195	130	160	13	26.7	46	137	27
CAT50-HYS08-150	08	150	84	115	15	23.9	46	92	27
CAT50-HYS08-195	08	195	130	160	15	28.7	46	137	27
CAT50-HYS10-150	10	150	84	115	17	25.9	46	92	33
CAT50-HYS10-195	10	195	130	160	17	30.7	46	137	33
CAT50-HYS12-150	12	150	84	115	19	27.9	46	92	36
CAT50-HYS12-195	12	195	130	160	19	32.7	46	137	36
CAT50-HYS16-150	16	150	84	115	23	31.9	52.5	91	40
CAT50-HYS16-195	16	195	129	160	23	36.6	52.5	135	40
CAT50-HYS20-150	20	150	84	115	28	36.9	60	91	40
CAT50-HYS20-195	20	195	129	160	28	41.6	60	135	40
CAT50-HYS25-150	25	150	84	115	37	45.9	60	91	50
CAT50-HYS25-195	25	195	129	160	37	50.6	60	135	50


Hydraulic Chuck, Slim

液压刀柄, 细长型

A ↗
≤0.003

RPM
G2.5/25000

AD

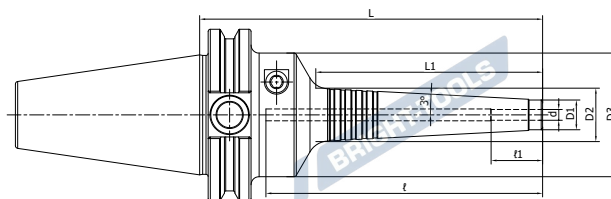

Size	d	L	L1	D1	D2	D3	L	l1
CAT40-HYS1/8"-90	1/8"	3.543"	1.457"	0.433"	0.5"	1.811"	4.921"	0.63"
CAT40-HYS1/8"-135	1/8"	5.315"	3.307"	0.433"	0.783"	1.811"	6.692"	0.63"
CAT40-HYS1/4"-150	1/4"	5.906"	3.307"	0.512"	0.862"	1.811"	3.622"	1.063"
CAT40-HYS1/4"-165	1/4"	6.496"	3.898"	0.512"	0.921"	1.811"	4.213"	1.063"
CAT40-HYS1/4"-195	1/4"	7.677"	5.118"	0.512"	1.051"	1.811"	5.394"	1.063"
CAT40-HYS5/16"-150	5/16"	5.906"	3.307"	0.591"	0.941"	1.811"	3.622"	1.063"
CAT40-HYS5/16"-165	5/16"	6.496"	3.898"	0.591"	1"	1.811"	4.213"	1.063"
CAT40-HYS5/16"-195	5/16"	7.677"	5.118"	0.591"	1.13"	1.811"	5.394"	1.063"
CAT40-HYS3/8"-150	3/8"	5.906"	3.307"	0.669"	1.02"	1.811"	3.622"	1.299"
CAT40-HYS3/8"-165	3/8"	6.496"	3.898"	0.669"	1.079"	1.811"	4.213"	1.299"
CAT40-HYS3/8"-195	3/8"	7.677"	5.118"	0.669"	1.209"	1.811"	5.394"	1.299"
CAT40-HYS1/2"-150	1/2"	5.906"	3.307"	0.787"	1.138"	1.811"	3.622"	1.417"
CAT40-HYS1/2"-165	1/2"	6.496"	3.898"	0.787"	1.197"	1.811"	4.213"	1.417"
CAT40-HYS1/2"-195	1/2"	7.677"	5.118"	0.787"	1.327"	1.811"	5.394"	1.417"
CAT40-HYS5/8"-150	5/8"	5.906"	3.307"	0.906"	1.256"	2.067"	3.583"	1.575"
CAT40-HYS5/8"-180	5/8"	7.087"	4.488"	0.906"	1.378"	2.067"	4.724"	1.575"
CAT40-HYS5/8"-195	5/8"	7.677"	5.079"	0.906"	1.441"	2.067"	5.315"	1.575"
CAT40-HYS3/4"-150	3/4"	5.906"	3.307"	1.102"	1.453"	2.362"	3.583"	1.575"
CAT40-HYS3/4"-180	3/4"	7.087"	4.488"	1.102"	1.575"	2.362"	4.724"	1.575"
CAT40-HYS3/4"-195	3/4"	7.677"	5.079"	1.102"	1.638"	2.362"	5.315"	1.575"
CAT40-HYS1"-150	1"	5.906"	3.307"	1.496"	1.846"	2.362"	3.583"	1.969"
CAT40-HYS1"-180	1"	7.087"	4.488"	1.496"	1.969"	2.362"	4.724"	1.969"
CAT40-HYS1"-195	1"	7.677"	5.079"	1.496"	2.031"	2.362"	5.315"	1.969"

Hydraulic Chuck, Slim


液压刀柄, 细长型



A ↗
≤0.003

RPM
G2.5/25000

AD

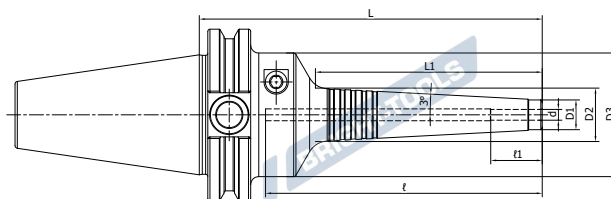


Size	d	L	L1	L2	D1	D2	D3	l	l1
CAT50-HYS1/4"-150	1/4"	5.906"	3.307"	4.528"	0.512"	0.862"	1.811"	3.622"	1.063"
CAT50-HYS1/4"-180	1/4"	7.087"	4.488"	5.709"	0.512"	1.051"	1.811"	4.803"	1.063"
CAT50-HYS1/4"-195	1/4"	7.677"	5.118"	6.299"	0.512"	1.051"	1.811"	5.394"	1.063"
CAT50-HYS5/16"-150	5/16"	5.906"	3.307"	4.528"	0.591"	0.941"	1.811"	3.622"	1.063"
CAT50-HYS5/16"-180	5/16"	7.087"	4.488"	5.709"	0.591"	1.13"	1.811"	4.803"	1.063"
CAT50-HYS5/16"-195	5/16"	7.677"	5.118"	6.299"	0.591"	1.13"	1.811"	5.394"	1.063"
CAT50-HYS3/8"-150	3/8"	5.906"	3.307"	4.528"	0.669"	1.02"	1.811"	4.803"	1.299"
CAT50-HYS3/8"-180	3/8"	7.087"	4.488"	5.709"	0.669"	1.209"	1.811"	5.394"	1.299"
CAT50-HYS3/8"-195	3/8"	7.677"	5.118"	6.299"	0.669"	1.209"	1.811"	5.394"	1.299"
CAT50-HYS1/2"-150	1/2"	5.906"	3.307"	4.528"	0.787"	1.138"	1.811"	3.622"	1.417"
CAT50-HYS1/2"-180	1/2"	7.087"	4.488"	5.709"	0.787"	1.26"	1.811"	4.803"	1.417"
CAT50-HYS1/2"-195	1/2"	7.677"	5.118"	6.299"	0.787"	1.327"	1.811"	5.394"	1.417"
CAT50-HYS5/8"-150	5/8"	5.906"	3.307"	4.528"	0.906"	1.256"	2.067"	3.583"	1.575"
CAT50-HYS5/8"-180	5/8"	7.087"	4.488"	5.709"	0.906"	1.441"	2.067"	4.724"	1.575"
CAT50-HYS5/8"-195	5/8"	7.677"	5.079"	6.299"	0.906"	1.441"	2.067"	5.315"	1.575"
CAT50-HYS3/4"-150	3/4"	5.906"	3.307"	4.528"	1.102"	1.453"	2.362"	3.583"	1.575"
CAT50-HYS3/4"-180	3/4"	7.087"	4.488"	5.709"	1.102"	1.638"	2.362"	4.724"	1.575"
CAT50-HYS3/4"-195	3/4"	7.677"	5.079"	6.299"	1.102"	1.638"	2.362"	5.315"	1.575"
CAT50-HYS1"-150	1"	5.906"	3.307"	4.528"	1.496"	1.846"	2.362"	3.583"	1.969"
CAT50-HYS1"-180	1"	7.087"	4.488"	5.709"	1.496"	1.969"	2.362"	4.724"	1.969"
CAT50-HYS1"-195	1"	7.677"	5.079"	6.299"	1.496"	2.031"	2.362"	5.315"	1.969"

Hydraulic Chuck, Slim

液压刀柄, 细长型

A ↗
≤0.003

RPM
G2.5/25000

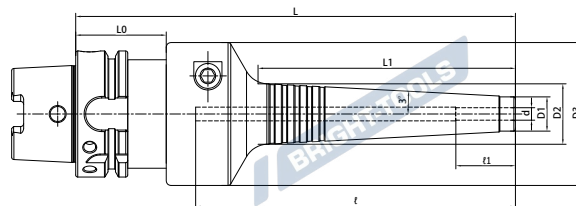
AD


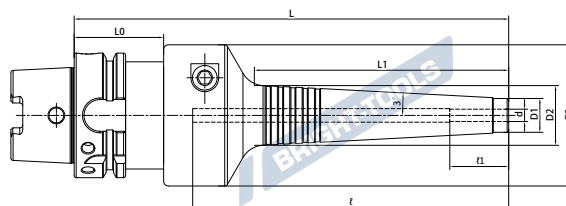
Size	d	L	L1	D1	D2	D3	L0	l1	l2
HSK40A-HYS03-90	03	90	28	11	14.0	46	35	74	16
HSK40A-HYS03-100	03	100	37	11	14.9	46	35	84	16
HSK40A-HYS03-145	03	145	84	11	19.9	46	35	129	16
HSK40A-HYS04-90	04	90	28	11	14.0	46	35	74	19
HSK40A-HYS04-100	04	100	37	11	14.9	46	35	84	19
HSK40A-HYS04-145	04	145	84	11	19.9	46	35	129	19
HSK40A-HYS06-105	06	105	38	13	17.0	46	35	55	27
HSK40A-HYS06-150	06	150	84	13	21.9	46	35	97	27
HSK40A-HYS06-165	06	165	99	13	23.4	46	35	112	27
HSK40A-HYS06-180	06	180	114	13	25.0	46	35	127	27
HSK40A-HYS08-105	08	105	38	15	19.0	46	35	55	27
HSK40A-HYS08-150	08	150	84	15	23.9	46	35	97	27
HSK40A-HYS08-165	08	165	99	15	25.4	46	35	112	27
HSK40A-HYS08-180	08	180	114	15	27.0	46	35	127	27
HSK40A-HYS10-120	10	120	53	17	22.6	46	35	69	33
HSK40A-HYS10-150	10	150	84	17	25.9	46	35	97	33
HSK40A-HYS10-165	10	165	99	17	27.4	46	35	112	33
HSK40A-HYS10-180	10	180	114	17	29.0	46	35	127	33
HSK40A-HYS12-120	12	120	53	19	24.6	46	35	69	36
HSK40A-HYS12-150	12	150	84	19	27.9	46	35	97	36
HSK40A-HYS12-165	12	165	99	19	29.4	46	35	112	36
HSK40A-HYS12-180	12	180	114	19	31.0	46	35	127	36

Hydraulic Chuck, Slim 液压刀柄, 细长型

A ↗
≤0.003

RPM
G2.5/25000

AD



Size	d	L	L1	D1	D2	D3	L0	l1	l2
HSK50A-HYS03-95	03	95	28	11	14.0	46	42	75	16
HSK50A-HYS03-105	03	105	37	11	14.9	46	42	85	16
HSK50A-HYS03-150	03	150	84	11	19.9	46	42	130	16
HSK50A-HYS04-95	04	95	28	11	14.0	46	42	75	19
HSK50A-HYS04-105	04	105	37	11	14.9	46	42	85	19
HSK50A-HYS04-150	04	150	84	11	19.9	46	42	130	19
HSK50A-HYS06-105	06	105	38	13	17.0	46	42	53	27
HSK50A-HYS06-150	06	150	84	13	21.9	46	42	95	27
HSK50A-HYS06-165	06	165	99	13	23.4	46	42	110	27
HSK50A-HYS06-180	06	180	114	13	25.0	46	42	125	27
HSK50A-HYS08-105	08	105	38	15	19.0	46	42	53	27
HSK50A-HYS08-150	08	150	84	15	23.9	46	42	95	27
HSK50A-HYS08-165	08	165	99	15	25.4	46	42	110	27
HSK50A-HYS08-180	08	180	114	15	27.0	46	42	125	27
HSK50A-HYS10-120	10	120	53	17	22.6	46	42	67	33
HSK50A-HYS10-150	10	150	84	17	25.9	46	42	95	33
HSK50A-HYS10-165	10	165	99	17	27.4	46	42	110	33
HSK50A-HYS10-180	10	180	114	17	29.0	46	42	125	33
HSK50A-HYS12-120	12	120	53	19	24.6	46	42	67	36
HSK50A-HYS12-150	12	150	84	19	27.9	46	42	95	36
HSK50A-HYS12-165	12	165	99	19	29.4	46	42	110	36
HSK50A-HYS12-180	12	180	114	19	31.0	46	42	125	36

HYDRO

Hydraulic Chuck, Slim 液压刀柄, 细长型

A ↗

≤0.003

RPM


G2.5/25000




AD



Type 1



Type 2




Size	Type	d	L	L1	D1	D2	D3	L0	l	l1
HSK63A-HYS03-80	2	03	80	28	11	14.0	46	-	58	16
HSK63A-HYS03-90	2	03	90	37	11	14.9	46	-	68	16
HSK63A-HYS03-135	2	03	135	84	11	19.9	46	-	113	16
HSK63A-HYS04-80	2	04	80	28	11	14.0	46	-	58	19
HSK63A-HYS04-90	2	04	90	37	11	14.9	46	-	68	19
HSK63A-HYS04-135	2	04	135	84	11	19.9	46	-	113	19
HSK63A-HYS06-90	2	06	90	38	13	17.0	46	-	53	27
HSK63A-HYS06-135	2	06	135	84	13	21.9	46	-	92	27
HSK63A-HYS06-150	2	06	150	99	13	23.4	46	-	107	27
HSK63A-HYS06-165	2	06	165	114	13	25.0	46	-	122	27
HSK63A-HYS06-180	2	06	180	130	13	26.7	46	-	137	27
HSK63A-HYS08-90	2	08	90	38	15	19.0	46	-	53	27
HSK63A-HYS08-135	2	08	135	84	15	23.9	46	-	92	27
HSK63A-HYS08-150	2	08	150	99	15	25.4	46	-	107	27
HSK63A-HYS08-165	2	08	165	114	15	27.0	46	-	122	27
HSK63A-HYS08-180	2	08	180	130	15	28.7	46	-	137	27
HSK63A-HYS10-105	2	10	105	53	17	22.6	46	-	67	33
HSK63A-HYS10-135	2	10	135	84	17	25.9	46	-	92	33
HSK63A-HYS10-150	2	10	150	99	17	27.4	46	-	107	33
HSK63A-HYS10-165	2	10	165	114	17	29.0	46	-	122	33
HSK63A-HYS10-180	2	10	180	130	17	30.7	46	-	137	33
HSK63A-HYS12-105	2	12	105	53	19	24.6	46	-	67	36
HSK63A-HYS12-135	2	12	135	84	19	27.9	46	-	92	36
HSK63A-HYS12-150	2	12	150	99	19	29.4	46	-	107	36
HSK63A-HYS12-165	2	12	165	114	19	31.0	46	-	122	36
HSK63A-HYS12-180	2	12	180	130	19	32.7	46	-	137	36
HSK63A-HYS16-135	2	16	135	84	23	31.9	52.5	-	91	40
HSK63A-HYS16-165	2	16	165	114	23	35.0	52.5	-	120	40
HSK63A-HYS16-180	2	16	180	129	23	36.6	52.5	-	135	40
HSK63A-HYS20-150	1	20	150	84	28	36.9	60	42	91	40
HSK63A-HYS20-180	1	20	180	114	28	40.0	60	42	120	40
HSK63A-HYS20-195	1	20	195	129	28	41.6	60	42	135	40
HSK63A-HYS25-150	1	25	150	84	37	45.9	60	42	91	50
HSK63A-HYS25-180	1	25	180	114	37	49.0	60	42	120	50
HSK63A-HYS25-195	1	25	195	129	37	50.6	60	42	135	50

Hydraulic Chuck, Slim 液压刀柄, 细长型

A ↗
≤0.003

RPM
G2.5/25000

AD

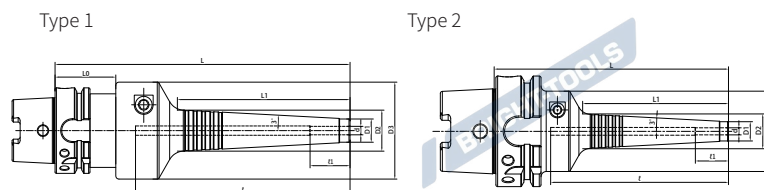

Size	Type	d	L	L1	D1	D2	D3	L0	l	l1
HSK100A-HYS06-105	2	06	105	38	13	17.0	46	-	53	27
HSK100A-HYS06-150	2	06	150	84	13	21.9	46	-	92	27
HSK100A-HYS06-165	2	06	165	99	13	23.4	46	-	107	27
HSK100A-HYS06-180	2	06	180	114	13	25.0	46	-	122	27
HSK100A-HYS06-195	2	06	195	130	13	26.7	46	-	137	27
HSK100A-HYS08-105	2	08	105	38	15	19.0	46	-	53	27
HSK100A-HYS08-150	2	08	150	84	15	23.9	46	-	92	27
HSK100A-HYS08-165	2	08	165	99	15	25.4	46	-	107	27
HSK100A-HYS08-180	2	08	180	114	15	27.0	46	-	122	27
HSK100A-HYS08-195	2	08	195	130	15	28.7	46	-	137	27
HSK100A-HYS10-150	2	10	150	84	17	25.9	46	-	92	33
HSK100A-HYS10-165	2	10	165	99	17	27.4	46	-	107	33
HSK100A-HYS10-180	2	10	180	114	17	29.0	46	-	122	33
HSK100A-HYS10-195	2	10	195	130	17	30.7	46	-	137	33
HSK100A-HYS12-150	2	12	150	84	19	27.9	46	-	92	36
HSK100A-HYS12-165	2	12	165	99	19	29.4	46	-	107	36
HSK100A-HYS12-180	2	12	180	114	19	31.0	46	-	122	36
HSK100A-HYS12-195	2	12	195	130	19	32.7	46	-	137	36
HSK100A-HYS16-150	2	16	150	84	23	31.9	52.5	-	91	40
HSK100A-HYS16-180	2	16	180	114	23	35.0	52.5	-	120	40
HSK100A-HYS16-195	2	16	195	129	23	36.6	52.5	-	135	40
HSK100A-HYS20-150	2	20	150	84	28	36.9	60	-	91	40
HSK100A-HYS20-180	2	20	180	114	28	40.0	60	-	120	40
HSK100A-HYS20-195	2	20	195	129	28	41.6	60	-	135	40
HSK100A-HYS25-150	2	25	150	84	37	45.9	60	-	91	50
HSK100A-HYS25-180	2	25	180	114	37	49.0	60	-	120	50
HSK100A-HYS25-195	2	25	195	129	37	50.6	60	-	135	50


Hydraulic Chuck, Slim

直柄液压刀柄，细长型


A ↗
≤0.003



Type 1




Type 2




Size	Type	d	L	L1	L2	D1	D2	D3	D4	ℓ	ℓ1
C20-HYS03-180	1	03	180	98	65	11	18	32	20	103	16
C20-HYS04-180	1	04	180	98	65	11	18	32	20	103	19
C20-HYS06-180	1	06	180	99	65	13	20	32	20	103	27
C20-HYS08-180	1	08	180	99	65	15	22	32	20	101	27
C20-HYS10-180	1	10	180	100	65	17	24	32	20	101	33
C20-HYS12-180	1	12	180	100	65	19	26	32	20	101	36
C32-HYS06-210	2	06	210	109	84	13	20	32	32	113	27
C32-HYS08-210	2	08	210	109	84	15	22	32	32	111	27
C32-HYS10-210	2	10	210	110	84	17	24	32	32	111	33
C32-HYS12-210	2	12	210	110	84	19	26	32	32	111	36

Hydraulic Chuck, for Grind 液压刀柄, 研磨机专用

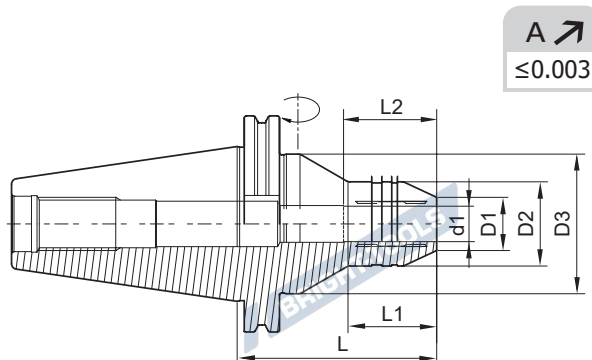

Size	d1	D1	D2	D3	L	L1	L2
SK50-HYG06-110	06	15	32	60	110	55	43
SK50-HYG08-110	08	17	33.5	60	110	55	43
SK50-HYG10-110	10	19	35	60	110	55	43
SK50-HYG12-110	12	21.5	36.5	60	110	55	50
SK50-HYG14-110	14	23.5	38	60	110	60	50
SK50-HYG16-110	16	25.5	39.5	60	110	60	53
SK50-HYG18-110	18	27.5	41	60	110	60	53
SK50-HYG20-110	20	28	42	70	110	47	95
SK50-HYG22-110	22	30	44	70	110	49	95
SK50-HYG32-110	32	40	54	70	110	62.5	95

MTB Hydraulic Chuck 莫氏液压刀柄

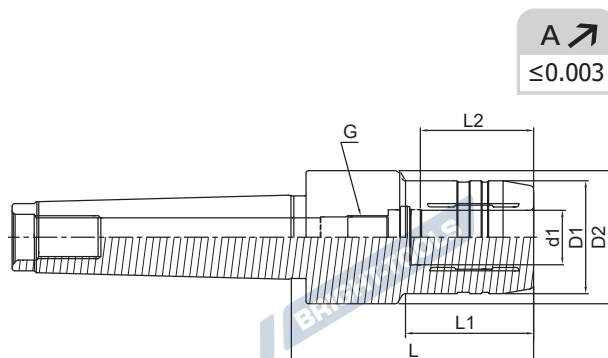

Size	d1	D1	D2	L	L1	L2	G
MTB4-HY20-90	20	42	49.5	90	47.5	52	M16×1
MTB4-HY32-90	32	72	72	90	-	62	-
MTB5-HY20-90	20	42	49.5	90	47.5	52	M16×1
MTB5-HY32-90	32	72	72	90	-	62	-


Hydraulic Chuck for CNC Automatic Lathe

液压刀柄, 走心机专用


A ↗
≤0.003



Type 1



Type 2




Size	Type	d	D1	L1	L2	W	T1	T2	l1	l2
ST16L-HY03-50	1	03	16	50	15	22	23	17.5	16	58
ST16L-HY04-50	1	04	16	50	15	22	23	17.5	19	58
ST16L-HY06-50	1	06	16	50	15	22	24.5	18.5	27	58
ST16L-HY08-50	2	08	16	50	15	24	25.5	19.5	27	47
ST20L-HY03-70	1	03	20	70	15	22	23	17.5	16	78
ST20L-HY04-70	1	04	20	70	15	22	23	17.5	19	78
ST20L-HY06-70	1	06	20	70	15	22	24.5	18.5	27	78
ST20L-HY08-70	2	08	20	70	15	24	25.5	19.5	27	64
ST20L-HY10-70	2	10	20	70	15	26	26.5	20.5	33	67
ST22L-HY03-70	1	03	22	70	15	24	23	17.5	16	78
ST22L-HY04-70	1	04	22	70	15	24	23	17.5	19	78
ST22L-HY06-70	1	06	22	70	15	24	24.5	18.5	27	78
ST22L-HY08-70	2	08	22	70	15	24	25.5	19.5	27	64
ST22L-HY10-70	2	10	22	70	15	26	26.5	20.5	33	67
ST22L-HY12-70	2	12	22	70	15	28	29	21.5	36	67
ST25L-HY03-70	1	03	25	70	15	28	23	17.5	16	78
ST25L-HY04-70	1	04	25	70	15	28	23	17.5	19	78
ST25L-HY06-70	1	06	25	70	15	28	24.5	18.5	27	78
ST25L-HY08-70	2	08	25	70	15	28	25.5	19.5	27	64
ST25L-HY10-70	2	10	25	70	15	28	26.5	20.5	33	67
ST25L-HY12-70	2	12	25	70	15	28	29	21.5	36	67
ST3/4"L-HY03-60	1	03	3/4"	60	15	22	23	17.5	16	68
ST3/4"L-HY04-60	1	04	3/4"	60	15	22	23	17.5	19	68
ST3/4"L-HY06-60	1	06	3/4"	60	15	22	24.5	18.5	27	68
ST3/4"L-HY08-60	2	08	3/4"	60	15	24	25.5	19.5	27	57
ST3/4"L-HY10-60	2	10	3/4"	60	15	26	26.5	20.5	33	60
ST1"L-HY03-70	1	03	1"	70	15	28	23	17.5	16	78
ST1"L-HY04-70	1	04	1"	70	15	28	23	17.5	19	78
ST1"L-HY06-70	1	06	1"	70	15	28	24.5	18.5	27	78
ST1"L-HY08-70	2	08	1"	70	15	28	25.5	19.5	27	64
ST1"L-HY10-70	2	10	1"	70	15	28	26.5	20.5	33	67
ST1"L-HY12-70	2	12	1"	70	15	28	29	21.5	36	67

Hydraulic Collet, Sealed

液压筒夹, 止水型


A ↗
≤0.003

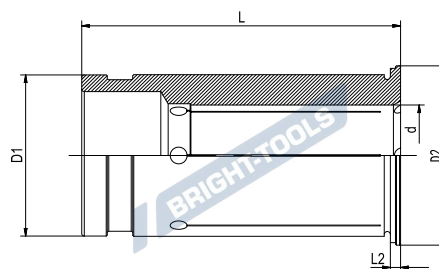

Size	d	D1	D2	L	L2
HY12S-03	03	12	16.5	47	2
HY12S-04	04	12	16.5	47	2
HY12S-05	05	12	16.5	47	2
HY12S-06	06	12	16.5	47	2
HY12S-07	07	12	16.5	47	2
HY12S-08	08	12	16.5	47	2
HY20S-03	03	20	24	52.5	2
HY20S-04	04	20	24	52.5	2
HY20S-05	05	20	24	52.5	2
HY20S-06	06	20	24	52.5	2
HY20S-07	07	20	24	52.5	2
HY20S-08	08	20	24	52.5	2
HY20S-09	09	20	24	52.5	2
HY20S-10	10	20	24	52.5	2
HY20S-11	11	20	24	52.5	2
HY20S-12	12	20	24	52.5	2
HY20S-13	13	20	24	52.5	2
HY20S-14	14	20	24	52.5	2
HY20S-15	15	20	24	52.5	2
HY20S-16	16	20	24	52.5	2

Hydraulic Collet, Sealed 液压筒夹, 止水型

A ↗
≤0.003

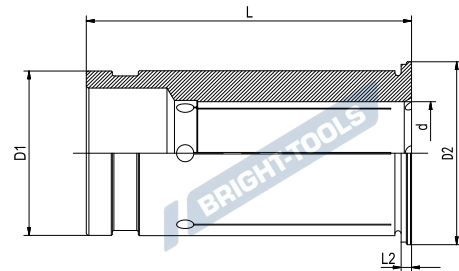


Size	d	D1	D2	L	L2
HY32S-06	06	32	35.5	62.5	2
HY32S-07	07	32	35.5	62.5	2
HY32S-08	08	32	35.5	62.5	2
HY32S-09	09	32	35.5	62.5	2
HY32S-10	10	32	35.5	62.5	2
HY32S-11	11	32	35.5	62.5	2
HY32S-12	12	32	35.5	62.5	2
HY32S-13	13	32	35.5	62.5	2
HY32S-14	14	32	35.5	62.5	2
HY32S-15	15	32	35.5	62.5	2
HY32S-16	16	32	35.5	62.5	2
HY32S-17	17	32	35.5	62.5	2
HY32S-18	18	32	35.5	62.5	2
HY32S-19	19	32	35.5	62.5	2
HY32S-20	20	32	35.5	62.5	2
HY32S-21	21	32	35.5	62.5	2
HY32S-22	22	32	35.5	62.5	2
HY32S-23	23	32	35.5	62.5	2
HY32S-24	24	32	35.5	62.5	2
HY32S-25	25	32	35.5	62.5	2

Hydraulic Collet with Coolant Channels

液压筒夹，端面出水型

A ↗

≤0.003

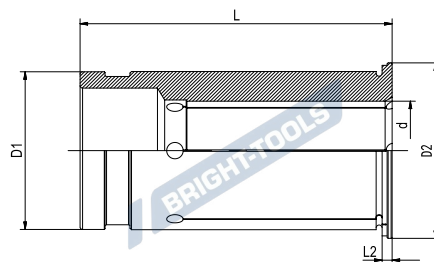


Size	d	D1	D2	L	L2
HY12S-03K	03	12	16.5	47	2
HY12S-04K	04	12	16.5	47	2
HY12S-05K	05	12	16.5	47	2
HY12S-06K	06	12	16.5	47	2
HY12S-07K	07	12	16.5	47	2
HY12S-08K	08	12	16.5	47	2
HY20S-03K	03	20	24	52.5	2
HY20S-04K	04	20	24	52.5	2
HY20S-05K	05	20	24	52.5	2
HY20S-06K	06	20	24	52.5	2
HY20S-07K	07	20	24	52.5	2
HY20S-08K	08	20	24	52.5	2
HY20S-09K	09	20	24	52.5	2
HY20S-10K	10	20	24	52.5	2
HY20S-11K	11	20	24	52.5	2
HY20S-12K	12	20	24	52.5	2
HY20S-13K	13	20	24	52.5	2
HY20S-14K	14	20	24	52.5	2
HY20S-15K	15	20	24	52.5	2
HY20S-16K	16	20	24	52.5	2

HYDRO

Hydraulic Collet with Coolant Channels

液压筒夹，端面出水型

A ↗
≤0.003

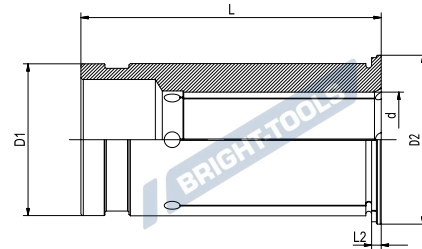

Size	d	D1	D2	L	L2
HY32S-06K	06	32	35.5	62.5	2
HY32S-07K	07	32	35.5	62.5	2
HY32S-08K	08	32	35.5	62.5	2
HY32S-09K	09	32	35.5	62.5	2
HY32S-10K	10	32	35.5	62.5	2
HY32S-11K	11	32	35.5	62.5	2
HY32S-12K	12	32	35.5	62.5	2
HY32S-13K	13	32	35.5	62.5	2
HY32S-14K	14	32	35.5	62.5	2
HY32S-15K	15	32	35.5	62.5	2
HY32S-16K	16	32	35.5	62.5	2
HY32S-17K	17	32	35.5	62.5	2
HY32S-18K	18	32	35.5	62.5	2
HY32S-19K	19	32	35.5	62.5	2
HY32S-20K	20	32	35.5	62.5	2
HY32S-21K	21	32	35.5	62.5	2
HY32S-22K	22	32	35.5	62.5	2
HY32S-23K	23	32	35.5	62.5	2
HY32S-24K	24	32	35.5	62.5	2
HY32S-25K	25	32	35.5	62.5	2

Hydraulic Collet Set

液压筒夹套装


HYDRO



Size	Hydraulic chuck	Hydraulic Collet	Collet Quantity
BT40-HY12-90-5 PCS	BT40-HY12-90	HYS12-3,4,5,6,8	5
BT40-HY20-90-5 PCS	BT40-HY20-90	HYS20-6,8,10,12,16	5
BT40-HY32-105-7 PCS	BT40-HY32-105	HYS32-6,8,10,12,16,20,25	7
SK40-HY12-80.5-5 PCS	SK40-HY12-80.5	HYS12-3,4,5,6,8	5
SK40-HY20-80.5-5 PCS	SK40-HY20-80.5	HYS20-6,8,10,12,16	5
SK40-HY32-80.5-7 PCS	SK40-HY32-80.5	HYS32-6,8,10,12,16,20,25	7
CAT40-HY12-81-5 PCS	CAT40-HY12-81	HYS12-3,4,5,6,8	5
CAT40-HY20-81-5 PCS	CAT40-HY20-81	HYS20-6,8,10,12,16	5
CAT40-HY32-81-7 PCS	CAT40-HY32-81	HYS32-6,8,10,12,16,20,25	7
HSK63A-HY12-85-5 PCS	HSK63A-HY12-85	HYS12-3,4,5,6,8	5
HSK63A-HY20-90-5 PCS	HSK63A-HY20-90	HYS20-6,8,10,12,16	5
HSK63A-HY32-125-7 PCS	HSK63A-HY32-125	HYS32-6,8,10,12,16,20,25	7

Hydraulic ER Collet

液压 ER 筒夹

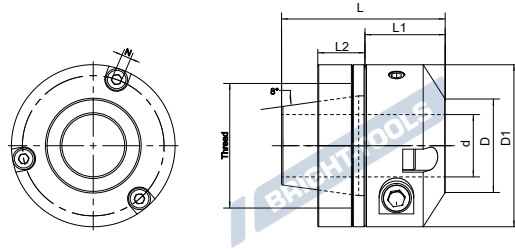

Metric

Size	d	D	D1	L	L1	L2	N	Dim.	Thread	T* (Nm)
HYER16-06	06	16	34	30	14	10	2.5	M3x12	M22x1.5	6-14
HYER16-08	08	18	36	30	14	10	2.5	M3x12	M22x1.5	14-35
HYER20-12	12	22	43.5	40	24	12	3	M4x20	M25x1.5	50-90
HYER25-12	12	26	48	46	26	13	3	M4x20	M32x1.5	50-90
HYER25-16	16	26	48	46	26	13	3	M4x20	M32x1.5	120-200
HYER32-20	20	30	52	52	25.5	15	3	M4x20	M40x1.5	230-370
HYER40-25	25	35	62	56	22	20	3	M4x20	M50x1.5	420-600
HYER50-32	32	42	78	60	22	20	3	M4x20	M64x2	660-1000
HYER16M-06	06	16	34	30	14	10	2.5	M3x12	M19x1	6-14
HYER16M-08	08	18	36	30	14	10	2.5	M3x12	M19x1	14-35
HYER20M-12	12	22	43.5	40	24	12	3	M4x20	M24x1	50-90
HYER25M-12	12	26	48	46	26	13	3	M4x20	M30x1	50-90
HYER25M-16	16	26	48	46	26	13	3	M4x20	M30x1	120-200

Inch

Size	d	D	D1	L	L1	L2	N	Dim.	Thread	T* (Nm)
HYER16-1/4"	1/4"	0.63	1.339	1.181	0.551	0.394	0.098	M3x12	M22x1.5	4.4-10
HYER20-1/2"	1/2"	0.866	1.713	1.575	0.945	0.472	0.118	M4x20	M25x1.5	37-66
HYER25-1/2"	1/2"	1.024	1.89	1.811	1.024	0.512	0.118	M4x20	M32x1.5	37-66
HYER25-5/8"	5/8"	1.024	1.89	1.811	1.024	0.512	0.118	M4x20	M32x1.5	89-148
HYER32-3/4"	3/4"	1.181	2.047	2.047	1.004	0.591	0.118	M4x20	M40x1.5	170-273
HYER40-1"	1"	1.378	2.323	2.205	0.866	0.787	0.118	M4x20	M50x1.5	310-443
HYER40-1-1/4"	1-1/4"	1.654	2.736	2.362	0.866	0.787	0.118	M4x20	M64x2	487-738
HYER20M-1/2"	1/2"	0.866	1.713	1.575	0.945	0.472	0.118	M4x20	M24x1	37-66